


InFocus IN5534/L

INFOCUS IN5534/L



With the IN5534/L, manufacturer InFocus offers a DLP projector with WUXGA 1920 x 1200 resolution and a contrast of 2000:1. The integrated media player allows files to be played directly. Thanks to the brightness of 7000 Ansi lumens, an image width of 850 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend max. 567 cm). Even 1080P video signals are no problem for the projector. With only 29 decibels of operating noise, the model is already very quiet compared to others. The model was built by InFocus in 2009 and is no longer current.

 1 x 0,67" DC DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Projector	7000 / 5500 im Eco Mode	3111 Lux (bei 200 cm Screen)
Contrast	2000:1 full on/off	2000:1 full on/off
Black Level Offset	3,5000 min. Lumen	1,557 min. Lumen

Resolution
WUXGA 1920 x 1200
2.304.000 Pixel

Video Modes
PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Media player formats: PDF, BMP, TIFF, PNG, GIF JPEG

Application
Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source
660 / 300Wim Eco Mode Lamp

Article Nr.: SP-LAMP-056

Light Life
2000 h. 2500 h. in Eco Mode

Operating Costs
-

Focus
Powered


Zoom
Powered 1,33

Objective
L / optional

Throw Ratio
1,45-1,93:1

Audio
2 x 5W

Connections
2 x HDMI in
2 x D-sub 15 pin in 1 x out
5 x BNC RGBHV in
YUV in
S-video in
Cinch Video in

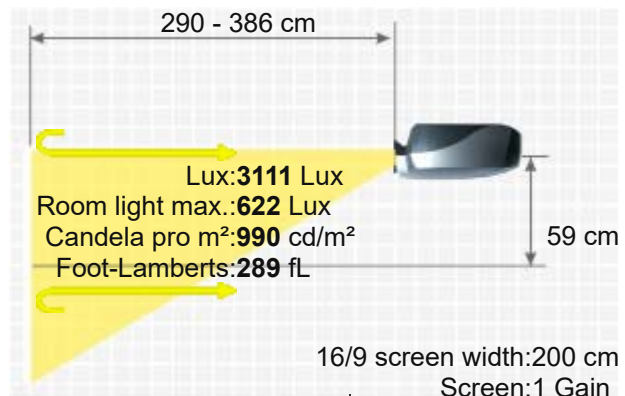

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Mini Jack Audio in und out
Cinch Stereo in
RS232C
RJ45
Yes
850 / 800W in Eco Mode
431,8 x 240 x 670,1 mm (17"x9,4"x26,4") 69,3 L/dm³
29dB

Weight
Keystone
Illumination

20,00 kg / 44,09 lbs.
-
-

Frequenz

H-sync: 15-100 kHz
V-sync: 50-85 Hz

Foot-Lamberts

289 fL / max. 850 cm screen width
990 cd/m²

- Full HD 1080P compatible
■ Integrated Mediaplayer
■ Freeze
■ Blank (Black screen button)
■ Blackboard Modus
■ Eco Mode
■ Kensington Slot
■ Gamma correction
■ 24/7 continuous operation capable
■ Picture-in-Picture
■ Password protection
■ BrilliantColor™
■ Control via web browser
■ Lan network compatible.
■ Overscan adjustable
■ Digital Zoom
■ RGBYW / 5 segment colour wheel

In Test

-
Bulb only Osram NLMP19010
NLMP19008

Right 2 lamp Ruby Ruby-LMP19010
Left 1 lamp ruby Ruby-LMP19008
Lamp 2 right original SP-LAMP-068 / SP-LAMP-056
Lamp 1 left original SP-LAMP-067 / SP-LAMP-055
Optional Twin lamp original SP-LAMP-067B / SP-LAMP-IN67B / SP-LAMP-IN55B
Compatible lamp LMP-K19007
Compatible lamp LMP-K19009
Universal Remote original Fernb-uni-V3
Object lens original LENS-052
Object lens original LENS-050

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19010>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LENS-053	3.67-6.97:1	7.3-13.9 m	50-10%	+/-10%	Powered
LENS-052	1.93-3.67:1	3.9-7.3 m	50-10%	+/-10%	Powered
LENS-051	1.21-1.45:1	2.4-2.9 m	50-10%	+/-10%	Powered
Fix Optional Lenses					
LENS-050	0.77:1	1.5 m	0.0% Fix		No Zoom

Status 2009 Discontinued (EOL) // Last update of the data: 2023-08-04



Data



More Details

HCinema

<https://www.projector-database.com/pro/infocusin5534-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.