
Appotronics AL-FU755A



A brief introduction to the AL-FU755A: The Appotronics 3D laser DLP projector offers 7200 Ansi lumens, a contrast of 100000:1 and a WUXGA 1920 x 1200 resolution. The lifespan of the laser is 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. Including a lens shift and keystone correction function, which provides freedom during installation. Thanks to the brightness of 7200 Ansi lumens, a picture width of 862 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend max. 575 cm). In the event that the image is still too small, the projector offers integrated edge blending software, with which several projectors can project a large image together. It is also Full HD 1080P and 3D compatible, meaning it can even project Blu-rays onto the ceiling thanks to 360Â° projection.

Brief Introduction Beta 2.5		
Display Type	1 x 0,67" DMD DLP Chip WUXGA 16/9 Ti Digital Light Processing Chip	
Ansi-Lumen	Projector: 7200	Screen: 3200 Lux (bei 200 cm Screen)
Contrast	Projector: 100000:1 full on/off	Screen: 100000:1 full on/off
Black Level	Projector: 0,0720 min. Lumen	Screen: 0,032 min. Lumen
Lens shift	Vert.: +/-50% Hori.: +/-20%	
Resolution	WUXGA 1920 x 1200 2.304.000 Pixel	
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p	
3D Compatibility	Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready)	
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Very large screen width and rooms with plenty of light and shaded daylight.	
Light Source	Laser ALPD	
Light Life	20000 h.	
Operating Costs	0,00 € Laser	
Focus	Powered	
Zoom	Powered	
Objective	optional	
Throw Ratio	optional	
Audio	No	
Connections	HDMI in DisplayPort 5x BNC 2x 3D Sync in und out Wired Remote M3 in und out D-sub 15pin in und out	

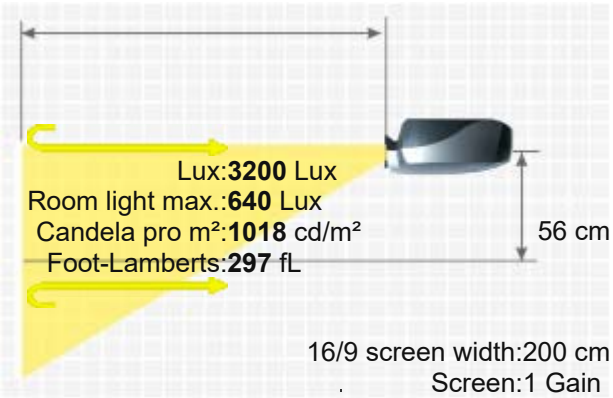


APPOTRONICS AL-FU755A

USB in
RS232C Din 9 pin in und out
RJ45 in



Ceiling Mounting	Yes
Power	650W
Size WxHxD	454 x 177 x 454 mm (17,9"x7"x17,9") 36,48 L/dm³
Operating Noise	37 / 35 dB in Eco Mode

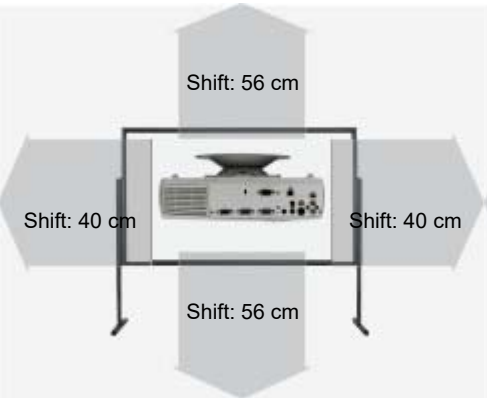

Weight	16,70 kg / 35,27 lbs.
Keystone	Vert.: +/-20° Hori.: +/-20°
Illumination	90%
Frequenz	-
Foot-Lamberts	297 fL / max. 862 cm screen width 1018 cd/m²



Features
- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- User logo
- Eco Mode
- Kensington Slot
- Warping
- 360° installable
- Edge Blending
- Password protection
- Lan network compatible.

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
EL470TZ	4.68-7.96:1	9.4-15.9 m	+/-50%	+/-20%	Powered
EL300LZ	2.86-4.85:1	5.7-9.7 m	+/-50%	+/-20%	Powered
1.62-2.96:1	1.62-2.96:1	3.2-5.9 m	+/-50%	+/-20%	Powered
1.23-1.97:1	1.23-1.97:1	2.5-3.9 m	+/-50%	+/-20%	Powered
Fix Optional Lenses					
AL-EL080FR	0.8:1	1.6 m	+/-50%	+/-20%	No Zoom
AL-EL062FR	0.62:1	1.2 m	+/-50%	+/-20%	No Zoom

Status: 2023 Current model // Last update of the data: 2023-09-20
Created: 2023-08-31 09:59:24

Data

More Details

HCinema
https://www.projector-database.com/pro/appotronicsalfu755a-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.