
InFocus LP540




INFOCUS LP540

Brief Introduction Beta 2.5	The LP540 LCD has 1700 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. Due to the brightness of 1700 Ansi lumens, a picture width of 359 cm is possible. In room light, the picture should be max. 239 cm wide. Playing 1080P is also no problem for the projector. The model was built by InFocus in 2004 and is no longer current.
Display Type	3 x 0,79" LCD TFT Panel mit MLA XGA 4/3 Liquid Crystal Display with Micro Lense Array
Ansi-Lumen	Projector: 1700 / Screen: 567 Lux (200 cm Screen width)
Contrast	Projector: 400:1 full on/off / Screen: 400:1 full on/off
Black Level	Projector: 4,2500 min. Lumen / Screen: 1,428 min. Lumen
Offset	
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	170W UHP Lamp Article Nr.: SP-LAMP-017
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	-
Throw Ratio	1,6-1,91:1
Audio	2W Stereo
Connections	M1-DA in D-sub 15pin in RS232C USB in Cinch Stereo in Cinch Video in S-Video in Mini Jack



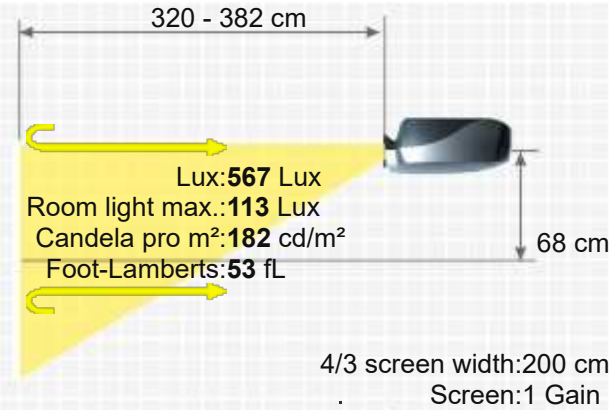

Ceiling Mounting	Yes, is possible.
Power	260W
Size WxHxD	260 x 103 x 294 mm (10,2"x4,1"x11,6") 7,87 L/dm³
Operating Noise	34dB

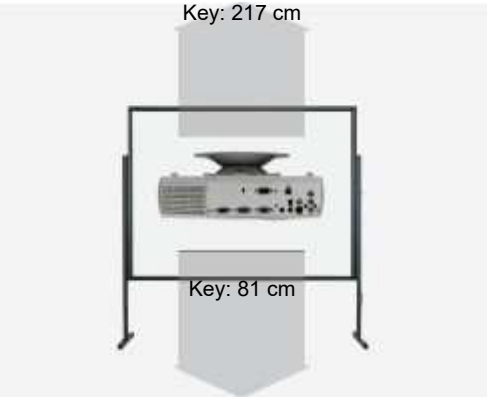

Weight	3,40 kg / 7,5 lbs.
Keystone	Vert.: +/-25°
Illumination	75%
Frequenz	H-sync: 16-110 kHz V-sync: 50-85 Hz Range max.: 135 MHz
Foot-Lamberts	53 fL / max. 359 cm screen width 182 cd/m²
Features	■ Full HD 1080P compatible ■ Freeze ■ Blank (Black screen button) ■ Kensington Slot ■ Picture-in-Picture ■ Remote control with mouse control ■ Digital Zoom ■ optional W-Lan fähig.
Screen Mirroring	-

Optional accessories

	Nackte Philips Lampe	NLMP403	95,50 €
	Lampe Ruby	Ruby-LMP403	114,28 €
	Lampe Original	SP-LAMP-017	EOL €
	Kompatible Lampe	LMP-K15646	60,21 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Deckenhalterung Länge 100-120 mm	Halterung120	47,86 €
	Luftfilter universal	uni3mm	18,15 €

Status 2004 Discontinued (EOL) // Last update of the data: 2026-06-09

Data



More Details

HCinema

https://www.projector-database.com/pro/infocuslp540-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.