InFocus Work Big IN26+/EP



Brief Introduction Beta 2.5	The Work Big IN26+/EP DLP has 2400 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. The projector will be able to illuminate a picture width of 427 cm well. However, if room light is available, the image width should ideally not exceed 285 cm. The model was built by InFocus in 2007 and is no longer current.
Display Type	1 x 0,55" DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 2400 neu / 2200 alt — Screen: 800 Lux (bei 200 cm Screen)
Contrast	Projector: 2000:1 full on/off — Screen: 2000:1 full on/off
Black Level	Projector: 1,2000 min. Lumen — Screen: 0,401 min. Lumen
Offset	
Resolution	XGA 1024 x 768 786.432 Pixel SXGA+ 1400 x 1050 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200W SHP Lamp Articel Nr.: SP-LAMP-028
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,1
Objective	f=22-24 mm
Throw Ratio	1,94-2,13:1
Audio	1 x 1W Mono
Connections	D-sub 15pin in und out S-Video in Cinch Video in Cinch Stereo out Mini Jack out USB in
Ceiling Mounting	Yes
Power	300W
Size WxHxD	304 x 101 x 240 mm (12"x4"x9,4") 7,37 L/dm³
Operating Noise	35 dB in Eco Mode
Weight	2,70 kg / 5,95 lbs.







INFOCUS WORK BIG IN26+/EP

Keystone	Vert. +30°-25°
Illumination	-
Frequenz	H-sync: 15,75-85 kHz V-sync: 48-85 Hz
Foot-Lamberts	74 fL / max. 427 cm screen width 254 cd/m²

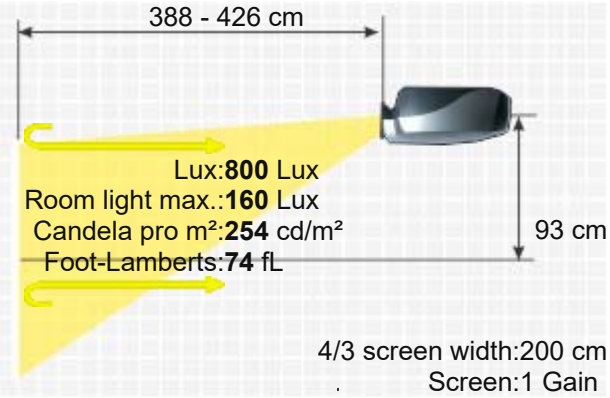

Features

- Freeze
- Blank (Black screen button)
- Eco Mode
- Kensington Slot
- Password protection
- Remote control with mouse control
- Optional Wi-Fi network compatible.
- Overscan adjustable
- 4-segment, 2-speed colour wheel

Optional

Bulb only	NLMP16438
Lamp ruby	Ruby-LMP16438
Lamp original	SP-LAMP-028
Universal Remote original	Fernb-uni-V3
Ceiling Mount 100-120	Halterung100

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n16439

Status Data: 2007 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details: https://www.projector-database.com/pro/infocusworkbigin26plus-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.