
Infoto PCL-DF351S



The Infoto PCL-DF351S 3D BrilliantColor DLP projector has 3500 Ansi lumens, a contrast of 15000:1 and an SVGA 800 x 600 resolution. The lamp has a service life of up to 10,000 hours, which is over 13.7 years if enjoyed for two hours a day. A picture width of up to 515 cm is possible, if the picture width is smaller (we recommend max. 343 cm), rooms with residual light are also no problem. The model is also Full HD 1080P and 3D compatible. The operating noise of just 30 decibels makes the projection quiet. The model was built by Infoto in 2016 and is no longer current.

Brief Introduction Beta 2.5			
Display Type	1 x 0,55" DLP Chip SVGA 4/3 Ti Digital Light Processing Chip		
Ansi-Lumen	Projector: 3500	Screen: 1167 Lux (bei 200 cm Screen)	
Contrast	15000:1 full on/off	15000:1 full on/off	
Black Level	0,2333 min. Lumen	0,078 min. Lumen	
Offset			
Resolution	SVGA 800 x 600 480.000 Pixel		
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p		
3D Compatibility	Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready)		
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.		
Light Source	203 / 170W im Eco Mode Lamp		
Light Life	4500 h. 10000 h. in Eco Mode		
Operating Costs	-		
Focus	Manual		
Zoom	Manual 1,1		
Objective	F=2,51-2,69 f=21,95-24,18 mm		
Throw Ratio	1,97-2,17:1		
Audio	2W Mono		
Connections	HDMI 1.4a D-sub 15pin Cinch Video in USB Typ B in RS232C Din 9 pin in		
Ceiling Mounting	Yes		
Power	-		
Size WxHxD	285 x 111 x 193 mm (11,2"x4,4"x7,6") 6,11 L/dm³		
Operating Noise	30 / 28 dB in Eco Mode		
Weight	1,97 kg / 2,2 lbs.		
Keystone	Vert.: +/-40°		
Illumination	-		



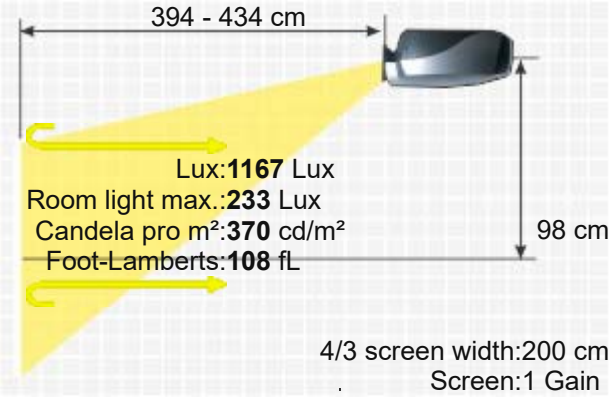

INFOTO PCL-DF351S

Frequenz	H-sync: 31-100 kHz V-sync: 50-120 Hz
Foot-Lamberts	108 fL / max. 515 cm screen width 370 cd/m²
Features	■ Real Full HD 3D ■ Full HD 1080P compatible ■ Eco Mode ■ Kensington Slot ■ BrilliantColor™ ■ 5 segment WBRYG colour wheel.
Status	2016 Discontinued (EOL) // Last update of the data: 2024-07-04
Data	
More Details	https://www.projector-database.com/pro/infotoPCLDF351s-en.html



Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.