
JAVES D525




Brief Introduction Beta 2.5	With the D525, manufacturer JAVES offers a standard portable DLP projector with XGA 1024 x 768 resolution and a contrast of 2300:1. 2600 Ansi lumens ensure that a picture width of 444 cm is also possible. However, if room light is available, the picture should be max. 296 cm wide. The model was built by JAVES in 2009 and is no longer current.
Display Type	1 x 0,55" DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 2600 / Screen: 867 Lux (bei 200 cm Screen)
Contrast	Projector: 2300:1 full on/off / Screen: 2300:1 full on/off
Black Level	Projector: 1,1304 min. Lumen / Screen: 0,377 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	240 / 180W Eco Mode Lamp Articel Nr.: 5811116310-S
Light Life	3000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,12
Objective	-
Throw Ratio	1,93-2,16:1
Audio	-
Connections	HDMI 1.3 in D-sub 15 pin in und out S-Video in Cinch Video in RS232C
Ceiling Mounting	Yes
Power	300W
Size WxHxD	261 x 78 x 97 mm (10,3"x3,1"x3,8") 1,97 L/dm³
Operating Noise	35 / 29 dB in Eco Mode

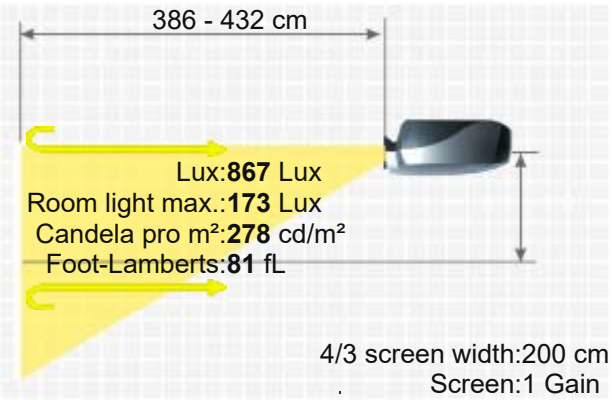

Key: 103 cm

JAVES D525

Weight	1,90 kg / 4,19 lbs.
Keystone	Vert.: +/-15°
Illumination	-
Frequenz	-
Foot-Lamberts	81 fL / max. 444 cm screen width 278 cd/m²
Features	■ Eco Mode

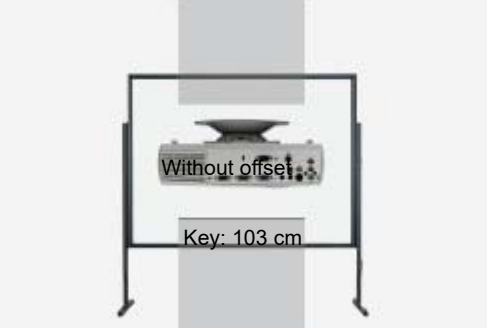

Optional		
	Bulb only	NLMP19229
	Lamp ruby	Ruby-LMP19229
	Lamp original	5811116310-S
	Compatible lamp	LMP-K19228
	Remote control original	5041849100

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n19229

Status Data: 2009 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details: HCinema https://www.projector-database.com/pro/javesd525-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.