

ASK Impression 880



Brief Introduction

Beta 2.5

Display Type



1 x 8,4" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Ansi-Lumen

350

113 Lux (bei 203 cm Screen)

Contrast

100:1 full on/off

100:1 full on/off

Black Level

3,5000 min. Lumen

1.165 min. Lumen

Offset

-

Resolution

SVGA 800 x 600
480.000 Pixel
XGA 1024 x 768 compressed

Video Modes

NTSC, PAL, SECAM

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Light Source

575W Metalldampf Lamp
Articel Nr.: 403311 / LAMP-006

Light Life

750 h.

Operating Costs

-

Focus

Manual

Zoom

-

Objective

f=215-225 mm

Throw Ratio

1,26-1,32:1

Audio

2 x 5W

Connections

S-Video in
Cinch Video in
Maus in
Mini jack 2 x in 1 x out
D-sub 15pin in und out

Ceiling Mounting

Yes

Power

700W

Size WxHxD

302 x 220 x 546 mm (11,9"x8,7"x21,5") 36,28 L/dm³

Operating Noise

40dB

Weight

8,50 kg / 18,74 lbs.

Keystone

-

Illumination

-

Frequenz

H-sync: 14-100 kHz
V-sync: 43-130 Hz

Foot-Lamberts


11 fL / max. 163 cm screen width
38 cd/m²

Features

- Freeze
- Gamma correction
- Remote control with mouse control

Status

- Discontinued (EOL) // Last update of the data: 2023-08-04

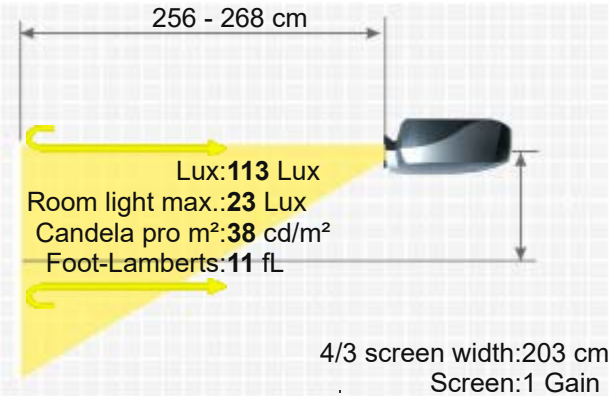

More Details



HCinema

<https://www.projector-database.com/pro/askimpression880-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.