
Jmgo E8



JMGO E8

Brief Introduction Beta 2.5	A brief introduction to the E8: The Jmgo 3D DLP projector offers 750 Ansi lumens, a contrast of 3000-5000:1 and a WXGA 1280 x 800 resolution. An image width of up to 278 cm is possible as the projector has 750 Ansi lumens. However, if room light is available, the image should be max. 185 cm wide. The model recognizes screen mirroring signals, so it is possible to play videos with high resolution and surround sound directly via WLAN from a smartphone, tablet or PC (Android, Windows and iOS). It is also Full HD 1080P and 3D compatible. The model was built by Jmgo in 2017 and is no longer current.
Display Type	1 x 0,45" DMD Chip WXGA 16/10 Ti Digital Light Processing Chip
Projector: Ansi-Lumen	750
Projector: Contrast	3000-5000:1 full on/off
Projector: Black Level Offset	0,2500 min. Lumen
Screen	300 Lux (bei 200 cm Screen) 3000-5000:1 full on/off 0,1 min. Lumen
Resolution	WXGA 1280 x 800 1.024.000 Pixel
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
3D Compatibility	Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready)
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	LED RGB
Light Life	-
Operating Costs	0,00 € LED
Focus	Powered
Zoom	No Zoom
Objective	-
Throw Ratio	1,2:1
Audio	-
Connections	HDMI in AV Jack in Mini Jack Audio out 2 x USB (1x 3.0) in RJ45 in
Ceiling Mounting	Yes
Power	45W
Size WxHxD	194,5 x 48 x 194,5 mm (7,6"x1,9"x7,6") 1,81 L/dm³

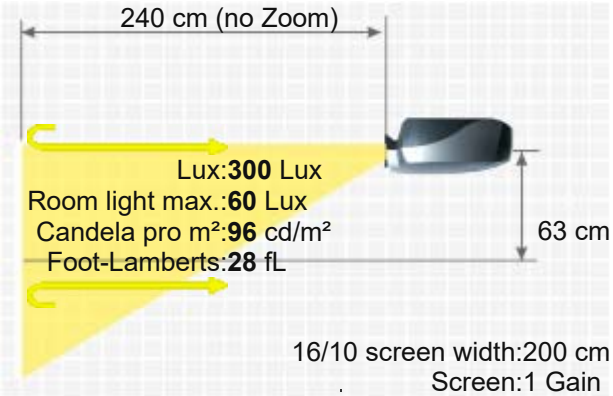

Operating Noise	-
Weight	-
Keystone	Vert.: +/-40°
Illumination	-
Frequenz	-
Foot-Lamberts	28 fL / max. 278 cm screen width 96 cd/m²
Features	■ Real Full HD 3D ■ Full HD 1080P compatible ■ Wi-Fi network compatible. ■ Lan network compatible. ■ Bluetooth ■ 4-Core CPU / 1GB DDR3 / 16 GB eMMC ■ Android 4.4
Status	2017 Discontinued (EOL) // Last update of the data: 2024-05-16



Data





More Details

https://www.projector-database.com/pro/jmgoe8-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.