
Maxell MP-EU5002



MAXELL MP-EU5002


Brief Introduction Beta 2.5	The MP-EU5002 Laser LCD has 5000 Ansi-Lumen, a contrast of 500000:1 and a WUXGA 1920 x 1200 resolution. Due to the laser, the projector is specified with 20000 hours of light life, which is over 13.7 years if enjoyed for four hours a day. The horizontal and vertical keystone correction provides leeway when setting up. 5000 Ansi lumens ensure that a picture width of 718 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 479 cm. With the HDMI MHL port, the smartphone image can be transmitted to the projector in Full HD at 60 Hz by screen mirroring and the smartphone is charged at the same time. Furthermore, the projector can play 1080P without any problems and even has the option of projecting HD 1080P Blu-rays onto the ceiling using 360Â° projection. The model was built by Maxell in 2018 and is no longer current.
Display Type	3 x 0,64" LCD TFT Panel WUXGA 16/9 Liquid Crystal Display
Ansi-Lumen	Projector: 5000 / Screen: 2222 Lux (bei 200 cm Screen)
Contrast	Projector: 500000:1 / Screen: 500000:1
Black Level	Projector: 0,0100 min. Lumen / Screen: 0,004 min. Lumen
Offset	-
Resolution	WUXGA 1920 x 1200 2.304.000 Pixel
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	Laser
Light Life	20000 h. 30000 h. in Eco Mode
Operating Costs	0,00 € Laser
Focus	Manual
Zoom	Manual 1,6
Objective	f=18,2-29,4 mm
Throw Ratio	1,3-2,1:1
Audio	16W
Connections	2 x HDMI in MHL D-sub 15pin 2x in und out Cinch Video in Cinch Stereo in Mini Jack Audio 2x in und out USB in RS232C Din 9 pin in

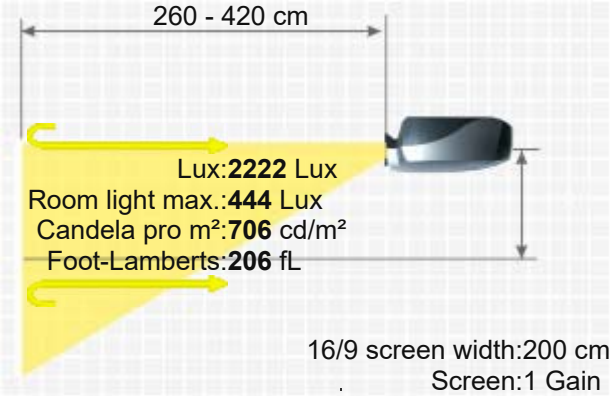

RJ45 in



Ceiling Mounting	Yes
Power	360W
Size WxHxD	505,5 x 134,6 x 424,2 mm (19,9"x5,3"x16,7") 28,69 L/dm³
Operating Noise	-

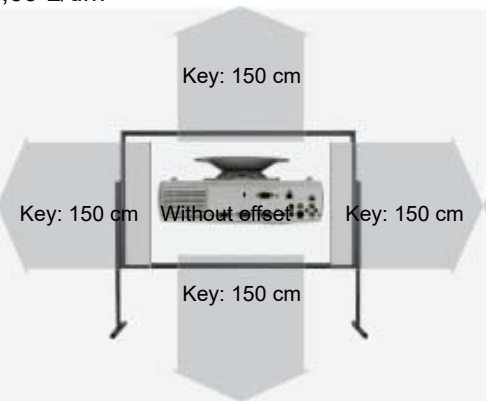

Weight	7,62 kg / 16,8 lbs.
Keystone	Vert.: +/-30° Hori.: +/-30°
Illumination	-
Frequenz	H-sync: 15-106 kHz V-sync: 50-120 Hz
Foot-Lamberts	206 fL / max. 718 cm screen width 706 cd/m²
Features	■ Full HD 1080P compatible ■ Eco Mode ■ Kensington Slot ■ 360° installable ■ Optional Wi-Fi network compatible. ■ Lan network compatible. ■ Crestron®-Software compatible. ■ AMX ■ DICOM
Status	2018 Discontinued (EOL) // Last update of the data: 2024-10-02 Created: 2019-04-08 19:29:37
Data	
More Details	https://www.projector-database.com/pro/maxellmpeu5002-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.