ASK Proxima C2300



Display Type	3 x 0,63" LCD TFT Panel 4/3 Liquid Crystal Display		
Ansi-Lumen	Projector: 3000	Screen: 1000 Lux (bei 200 cm Screen)	
Contrast	Projector: 3000:1 full on/off	Screen: 3000:1 full on/off	
Black Level	Projector: 1,0000 min. Lumen	Screen: 0,334 min. Lumen	
Offset	-		
Resolution	-		
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p		
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.		
Light Source	230W Lamp		
Light Life	-		
Operating Costs	-		
Focus	Manual		
Zoom	Manual 1,2		
Objective	F=2,3-2,5 f=18,82-22,60 mm		
Throw Ratio	1,47-1,77:1		
Audio	2 x 3W		
Connections	D-sub 15 pin in und out S-Video in Cinch Video in Cinch Stereo in Mini Jack Audio in RS232C Din 9 pin		
Ceiling Mounting	Yes		
Power	-		
Size WxHxD	327 x 87 x 241 mm (12,9"x3,4"x9,5") 6,86 L/dm³		
Operating Noise	34 / 29 dB in Eco Mode		
Weight	2,90 kg / 6,39 lbs.		
Keystone	Vert.: +/-30° automatisch		
Illumination	-		
Frequenz	H-sync: 15-100 kHz V-sync: 48-100 Hz		
Foot-Lamberts	93 fL / max. 477 cm screen width 319 cd/m²		
Features	■ Eco Mode ■ Automatic and manual vertical keystone correction		
Status	2011 Discontinued (EOL) // Last update of the data: 2023-08-04		
Data			

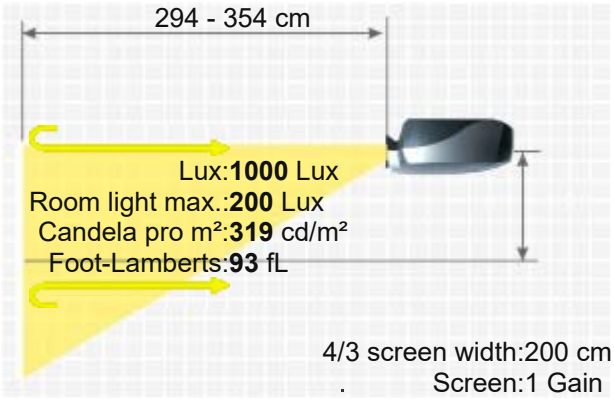

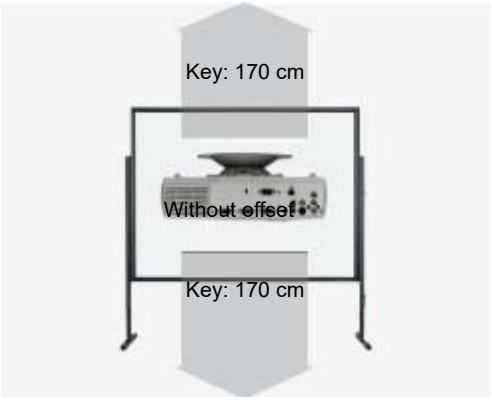

ASK PROXIMA C2300

More Details

HCinema

https://www.projector-database.com/pro/askproximac2300-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.