
Mitsubishi HC2



Brief Introduction Beta 2.5	A brief introduction to the Mitsubishi HC2. The home cinema LCD projector has an SVGA 800 x 600 resolution and a contrast of 600:1. The projector can illuminate a picture width of up to 289 cm thanks to its 1100 Ansi lumens. In room light, however, the image width should ideally be less than 193 cm. The model was built by Mitsubishi in 2003 and is no longer current.
Display Type	3 x 0,7" LCD TFT Panel SVGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	1100
Projector: Contrast	600:1 full on/off
Projector: Black Level	1,8333 min. Lumen
Screen	356 Lux (bei 203 cm Screen) 600:1 full on/off 0.596 min. Lumen
Offset	
Resolution	SVGA 800 x 600 480.000 Pixel 1280 x 1024 compressed
Video Modes	NTSC/NTSC 4.43/PAL (including PAL-M, N)/SECAM/PAL-60/DVD (component) HDTV input ready (525p, 720p, 1080i)
Disc Recognition	DVD | HD Blu-ray (komprimiert) | ~~3D Blu-ray~~ | ~~4K UHD Blu-ray~~
Application	Homeciname | Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	150W UHP Lamp Articel Nr.: VLT-HC2LP
Light Life	2500 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,19
Objective	F=1,9-2,2 f=27-32 mm
Throw Ratio	1,8-2,2:1
Audio	1W Mono
Connections	1 x D-Sub 15-pin in x 1 out 1 x Cinch Video in 1 x S-Video 1 x RS232C din8 pin Cinch Stereo
Ceiling Mounting	Yes
Power	230W
Size WxHxD	237 x 106 x 315 mm (9,3"x4,2"x12,4") 7,91 L/dm³
Operating Noise	-
Weight	2,90 kg / 6,39 lbs.
Keystone	Vertical
Illumination	-
Frequenz	H-sync: 15-82 kHz V-sync: 50-85 Hz Range max.: 180 MHz
Foot-Lamberts	33 fL / max. 289 cm screen width 113 cd/m²

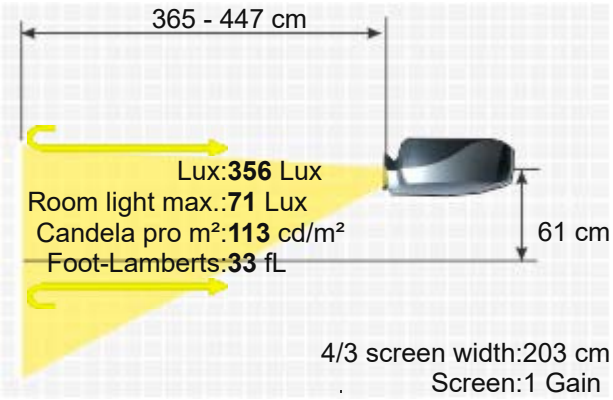

Features	■ Freeze ■ Kensington Slot ■ sRGB ■ Gamma correction ■ Remote control with laser pointer ■ ColorView ■ ■ CineView ■ RIS® (Room IlluminationSensor) , ■ Digital Zoom

Optional	
Lamp ruby	Ruby-LMP2333
Lamp original	VLT-HC2LP
Compatible lamp	LMP-K16488
Universal Remote original	Fernb-uni-V3

Status	Order here: https://www.hcinema.de/lampen/shop-en.php?id=d2333
Data	2003 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details

HCinema

https://www.projector-database.com/pro/mitsubishihc2-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.