Nec LT156



Brief Introduction Beta 2.5	The Nec LT156 LCD projector has 1200 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. The integrated media player can play files directly. An image width of up to 302 cm is possible as the projector has 1200 Ansi lumens. However, if room light is available, the picture should be max. 201 cm wide. The model was built by Nec in 2001 and is no longer current.
Display Type	3 x 0,9" LCD TFT Panel mit MLA XGA 4/3 Liquid Crystal Display with Micro Lense Array
Ansi-Lumen	Projector: 1200 / 1000 im Eco Mode — Screen: 388 Lux (bei 203 cm Screen)
Contrast	Projector: 400:1 full on/off — Screen: 400:1 full on/off
Black Level	Projector: 3,0000 min. Lumen — Screen: 0.978 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	NTSC, PAL, SECAM, NTSC 4.43, Pal 60 **Media player formats:** txt, idx, HTML, JPEG und BMP
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	130 / 100W im Eco Mode Lamp Articel Nr.: 50020064 / LT57LP
Light Life	1000 h. 2000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,15
Objective	F=2,0-2,3 f=36,5-42 mm
Throw Ratio	2-2,3:1
Audio	1W Mono
Connections	DVI in S-Video Cinch Video in Cinch Stereo PC Control RS 232 PC Karte: Compact Flash
Ceiling Mounting	Yes

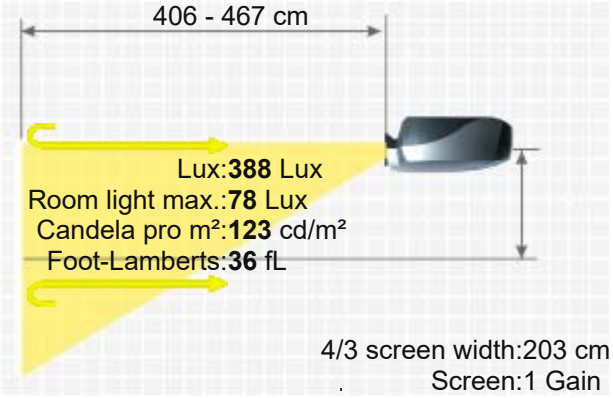

NEC LT156

Power	200W
Size WxHxD	207 x 63 x 266 mm (8,1"x2,5"x10,5") 3,47 L/dm³
Operating Noise	38dB

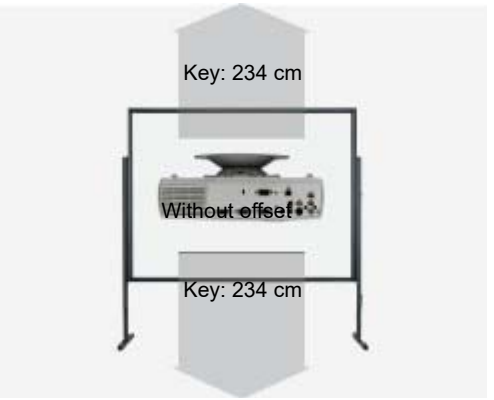

Weight	2,20 kg / 4,85 lbs.
Keystone	Vert.: +/-30°
Illumination	-
Frequenz	H-sync: 15-100 kHz V-sync: 50-117 Hz
Foot-Lamberts	36 fL / max. 302 cm screen width 123 cd/m²

Features

- Integrated Mediaplayer
- Freeze
- Eco Mode
- Kensington Slot
- Gamma correction
- Remote control with laser pointer und mouse control
- digital zoom up to 400

Optional

Lamp ruby	Ruby-LMP2469
Lamp original	LT57LP / 50021668
Compatible lamp	LMP-K2466
Universal Remote original	Fernb-uni-V3
Remote control original	7N900011 / RD-367E
Air filter original	24FT7541

Order here: https://www.hcinema.de/lampen/shop-en.php?id=d2468

Status: 2001 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details

https://www.projector-database.com/pro/neclt156-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.