
Nec LT280



NEC LT280


Brief Introduction Beta 2.5	The standard portable Nec LT280 LCD projector has 2500 Ansi lumens, a contrast of 600:1 and an XGA 1024 x 768 resolution. The integrated media player allows files to be played directly. Horizontal and vertical keystone correction makes image setup childs play. 2500 Ansi lumens ensure that a picture width of 435 cm is also possible. However, if room light is available, the picture should be max. 290 cm wide. The model was built by Nec in 2005 and is no longer current, but is still a popular projector in our database.
Display Type	3 x 0,7" LCD TFT Panel mit MLA XGA 4/3 Liquid Crystal Display with Micro Lense Array
Ansi-Lumen	Projector: 2500 / 1900 im Eco Mode — Screen: 833 Lux (bei 200 cm Screen)
Contrast	Projector: 600:1 full on/off — Screen: 600:1 full on/off
Black Level	Projector: 4,1667 min. Lumen — Screen: 1,395 min. Lumen
Offset	
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p **Media player formats:** JPEG, BMP, and PNG in the MS-DOS
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200 / 152W im Eco Mode Lamp Articel Nr.: 50025478 / VT75LP
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	28,57% / 0,12 €
Focus	Manual
Zoom	Manual 1,2
Objective	F=1,7-2,0 f=21,69-25,9 mm
Throw Ratio	1,463-1,769:1
Audio	1 x 1W Mono
Connections	D-sub 15pin in und out YUV in Cinch Video in Cinch Stereo in S-Video in Mini Jack in und out USB RS232C

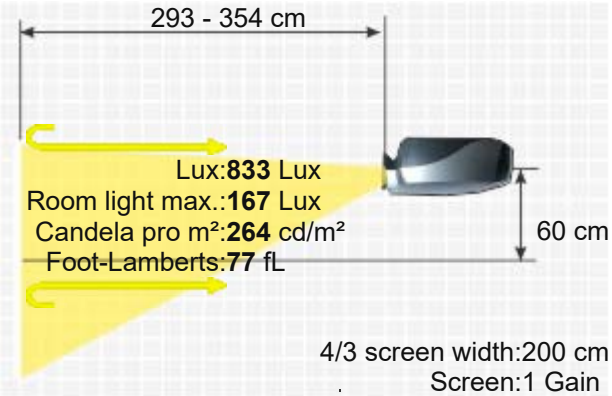

RJ45
PCMCIA in



Ceiling Mounting	Yes
Power	292 / 230W in Eco Mode
Size WxHxD	294 x 120 x 288 mm (11,6"x4,7"x11,3") 10,16 L/dm³
Operating Noise	35 / 30 dB in Eco Mode

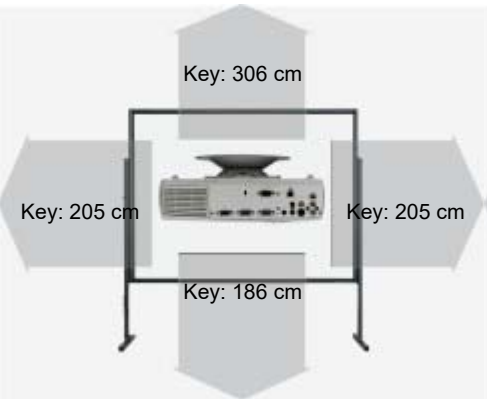

Weight	3,50 kg / 7,72 lbs.
Keystone	Vert.: +/-40° Hori.: +/-35°
Illumination	-
Frequenz	H-sync: 15-100 kHz V-sync: 48-120 Hz
Foot-Lamberts	77 fL / max. 435 cm screen width 264 cd/m²

Features

- Integrated Mediaplayer
- Freeze
- Blackboard Modus
- Eco Mode
- Kensington Slot
- sRGB
- Gamma correction
- Warping
- Password protection
- Remote control with laser pointer und mouse control
- Optional Wi-Fi network compatible.
- Lan network compatible.
- 3D Reform


Optional

Bulb only	NLMP2540
Lamp ruby	Ruby-LMP2540
Lamp incl. air filter original	VT75LP / 50030763 / VT75LP+E
Compatible lamp	LMP-K2540
Remote control original	7N901053 / RD-469E / 7N900881 / RD-443E
Air filter original	24FT9271
Air filter 2 original	24FT9601

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n4449

Status: 2005 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

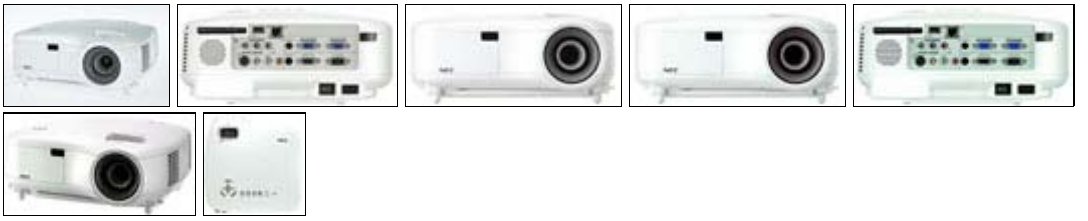

More Details

HCinema
https://www.projector-database.com/pro/neclt280-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.