
Nec ME342U



Brief Introduction Beta 2.5	The Nec ME342U 3D LCD projector has 3400 Ansi lumens, a contrast of 16000:1 and a WUXGA 1920 x 1200 resolution. The manufacturer specifies a lamp life of 10000 hours, which converts to over 13.7 years at 2 hours per day. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. An image width of up to 592 cm is possible. However, the image should be smaller in room light. We recommend max. 395 cm. Video signals 1080P and 4K (compressed) as well as 3D are also no problem for the projector, meaning that all Blu-ray formats currently available can be recognized by the projector. The model was built by Nec in 2019 and is no longer current.
Display Type	3 x 0,64" LCD TFT Panel WUXGA 16/9 Liquid Crystal Display
Ansi-Lumen	Projector: 3400 / Screen: 1511 Lux (bei 200 cm Screen)
Contrast	Projector: 16000:1 full on/off / Screen: 16000:1 full on/off
Black Level	Projector: 0,2125 min. Lumen / Screen: 0,094 min. Lumen
Offset	-
Resolution	WUXGA 1920 x 1200 2.304.000 Pixel UHD (4K2K) 3840 x 2160 compressed
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p
3D Compatibility	Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready)
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	210W Lamp Articel Nr.: NP47LP
Light Life	10000 h./ 15000 h. in Eco Mode
Operating Costs	38,1% / 0,16 €
Focus	Manual
Zoom	Manual 1,6
Objective	F=1,5-2,1 f=17,2-27,7 mm
Throw Ratio	1,2-2,0:1
Audio	1 x 16W
Connections	2 x HDMI in D-sub 15pin in und out Cinch Video in

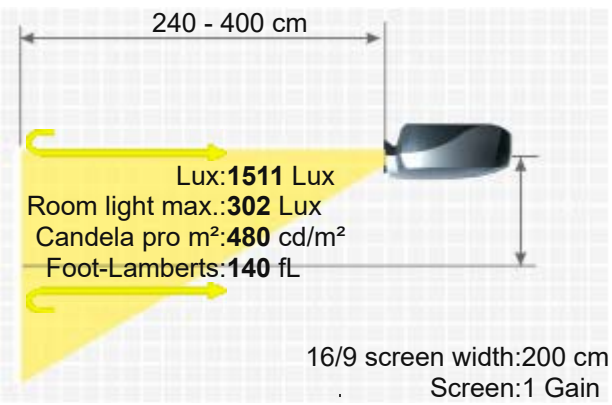


NEC ME342U

Cinch Stereo in
Mini Jack Audio in und out
USB in
RS232C Din 9 pin in
RJ45 in



Ceiling Mounting	Yes
Power	283W/ 202W in Eco Mode
Size WxHxD	345 x 104,6 x 261 mm (13,6"x4,1"x10,3") 9,36 L/dm³
Operating Noise	37 / 29 dB in Eco Mode

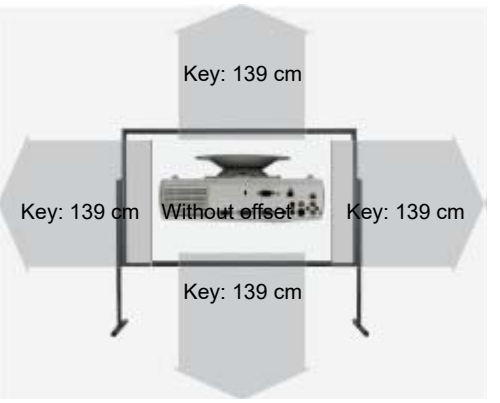

Weight	3,50 kg / 7,72 lbs.
Keystone	Vert.: +/-30° Hori.: +/-30°
Illumination	-
Frequenz	H-sync: 15-100 kHz V-sync: 50-120 Hz
Foot-Lamberts	140 fL / max. 592 cm screen width 480 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Optional Wi-Fi network compatible.
- Lan network compatible.

Optional


Remote control original	RD-477E, 7N901171, 7N901261, RMT-PJ39
Lamp original	NP47LP / 100015250

Order here: https://www.hcinema.de/lampen/shop-en.php?id=fro24821

Status

2019 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2019-02-19 21:00:29

Data

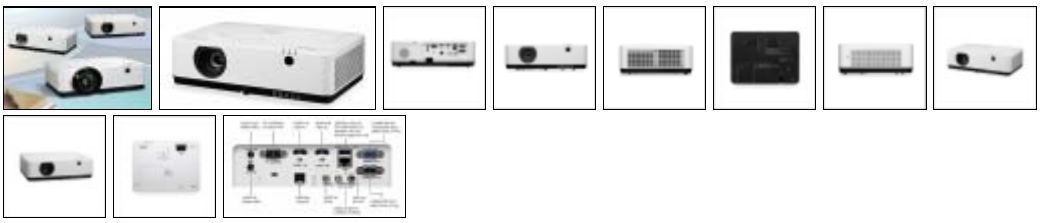

More Details

HCinema
https://www.projector-database.com/pro/necme342u-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.