
Avio MP 20E




Brief Introduction Beta 2.5	The Avio MP 20E LCD projector has 2000 Ansi lumens, a contrast of 350:1 and an XGA 1024 x 768 resolution. An image width of up to 389 cm is possible. However, the image should be smaller in room light. We recommend max. 259 cm. This model is no longer offered by Avio.
Display Type	3 x 0,7" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	2000
Projector: Contrast	350:1 full on/off
Projector: Black Level	5,7143 min. Lumen
Screen	647 Lux (bei 203 cm Screen) 350:1 full on/off 1.865 min. Lumen
Offset	
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280~1024 compressed
Video Modes	Pal, Secam, NTSC
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	180W HPM Lamp Articel Nr.: MPLK-C1
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	f=26,25-31,5 mm
Throw Ratio	1,85-2,21:1
Audio	1 x 2W Mono
Connections	D-sub 15pin in Cinch Video in Cinch Stereo in S-Video in Mini Jack in
Ceiling Mounting	Nein
Power	280W
Size WxHxD	310 x 140 x 405 mm (12,2"x5,5"x15,9") 17,58 L/dm³
Operating Noise	38 / 36 dB in Eco Mode



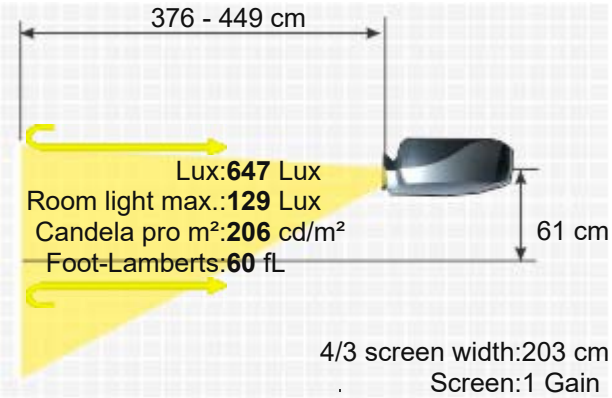

AVIO MP 20E

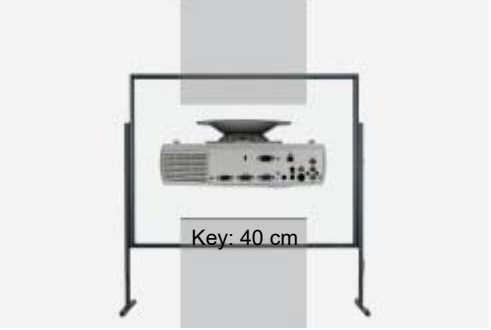

Weight	5,60 kg / 12,35 lbs.
Keystone	Vert.: +/-15°
Illumination	-
Frequenz	H-sync: 21-68,7 kHz V-sync: 50-85 Hz
Foot-Lamberts	60 fL / max. 389 cm screen width 206 cd/m²
Features	■ Freeze ■ Eco Mode ■ Picture-in-Picture ■ Document camera: 1/2-inch color CCD 2,000,000 pixels ■ Digital Zoom 6.25X
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details

HCinema

https://www.projector-database.com/pro/avioMP20E-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.