
Optoma DH351



OPTOMA DH351

Brief Introduction Beta 2.5	A brief introduction to the DH351: The Optoma standard portable 3D DLP projector offers 3600 Ansi lumens, a contrast of 22000:1 and an HDTV 1920 x 1080 resolution. The lamp life is specified by the manufacturer as 10000 hours, which converts to over 13.7 years at 2 hours per day. An image width of up to 610 cm is possible, if the image width is smaller (we recommend max. 407 cm), rooms with residual light are also no problem. The projector can also play 1080P and 3D without any problems. At just 28 decibels, the device is one of the quieter projectors. The model was built by Optoma in 2021 and is no longer current.
Display Type	DLP Chip HDTV 16/9 Ti Digital Light Processing Chip
Projector: Ansi-Lumen	3600
Projector: Contrast	22000:1
Projector: Black Level Offset	0,1636 min. Lumen
Screen	1600 Lux (bei 200 cm Screen) 22000:1 0,073 min. Lumen
Resolution	HDTV 1920 x 1080 2.073.600 Pixel
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
3D Compatibility	Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready)
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	240W Lamp Articel Nr.: SP.7EH01GC01 / BL-FU200E
Light Life	4000 h. / 10000 h. in Eco Mode
Operating Costs	9,52% / 0,04 €
Focus	Manual
Zoom	Manual 1,1
Objective	f=15,59-17,14 mm
Throw Ratio	1,47-1,62:1
Audio	1 x 5W
Connections	HDMI in Mini Jack Audio out USB



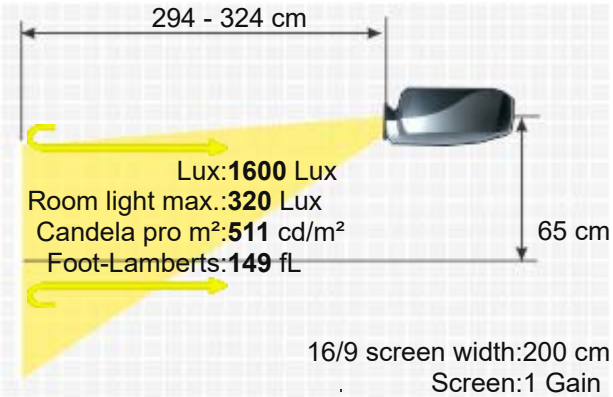

Ceiling Mounting	Yes
Power	295W / 205W in Eco Mode
Size WxHxD	316 x 108 x 244 mm (12,4"x4,3"x9,6") 8,33 L/dm³
Operating Noise	28 / 26 dB in Eco Mode



Weight	2,80 kg / 6,17 lbs.
Keystone	Vert.: +/-40°
Illumination	-
Frequenz	-
Foot-Lamberts	149 fL / max. 610 cm screen width 511 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- Kensington Slot

Optional

Lamp original	SP.7G901GC01 / BL-FU240H
Remote control original	BR-3001B

Order here: https://www.hcinema.de/lampen/shop-en.php?id=9002420

Status

2021 Discontinued (EOL) // Last update of the data: 2024-05-16
Created: 2021-04-19 13:03:04

Data



More Details

HCinema

https://www.projector-database.com/pro/optomadh351-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.