
Optoma DS329




OPTOMA DS329

Brief Introduction Beta 2.5	The Optoma DS329 3D BrilliantColor DLP projector has 2600 Ansi lumens, a contrast of 4000:1 and an SVGA 800 x 600 resolution. The lamp in the projector is specified with a lamp life of 5000 hours, which is over 6.8 years with a daily viewing time of 2 hours. 444 cm picture width, the projector will be able to illuminate well. However, if room light is available, the picture width should ideally not exceed 296 cm. Even 1080P video signals are no problem for the projector. The model was built by Optoma in 2011 and is no longer current.
Display Type	1 x 0,55" DC3 DLP Chip SVGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 2600 / Screen: 867 Lux (bei 200 cm Screen)
Contrast	Projector: 4000:1 full on/off / Screen: 4000:1 full on/off
Black Level	Projector: 0,6500 min. Lumen / Screen: 0,217 min. Lumen
Offset	
Resolution	SVGA 800 x 600 480.000 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
3D Compatibility	Frame Sequential (3D Ready) The 3D features of Optoma projectors can only be used with compatible 3D content. Typical applications include use with 3D educational or 3D design and modelling systems. Support for 3D TV broadcast systems,(SKY in the UK), Blu-ray 3D™ and 3D games from the Sony® PS3 or Microsoft® Xbox 360 will require the Optoma 3D-XL that is available separately.
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	- Articel Nr.: PA884-2401
Light Life	5000 h. 6000 in Eco Mode
Operating Costs	-
Focus	-
Zoom	-
Objective	F=2,51-2,69 f=21,95-24,18 mm
Throw Ratio	1,97-2,17:1
Audio	2W

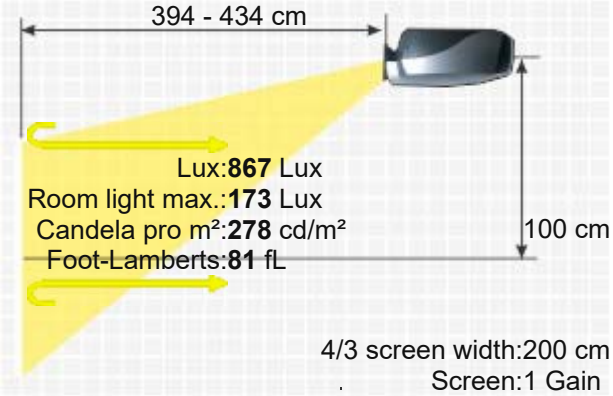

Connections	HDMI in 2 x D-sub 15 pin in 1 x out S-Bideo in Cinch Video in RS232C Mini USB in Mini Jack Audio in und out
Ceiling Mounting	Yes
Power	233W
Size WxHxD	280 x 77 x 230 mm (11"x3"x9,1") 4,96 L/dm³
Operating Noise	28 dB in Eco Mode

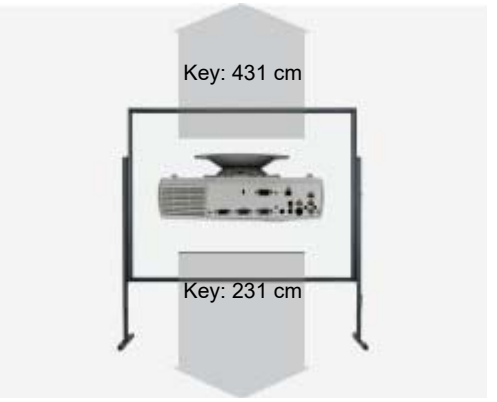

Weight	2,20 kg / 4,85 lbs.
Keystone	Vert.: +/-40°
Illumination	85%
Frequenz	H-sync: 15,3-91,1 kHz V-sync: 24-85 Hz
Foot-Lamberts	81 fL / max. 444 cm screen width 278 cd/m²

Features

- Full HD 1080P compatible
- Freeze
- Blackboard Modus
- Eco Mode
- Kensington Slot
- sRGB
- Gamma correction
- Password protection
- BrilliantColor™
- Remote control with mouse control

Optional

Lamp original	PA884-2401
Remote control original	BR-5023L / BR-3057L / BR-5029L / BR-5030L / BR-5033L

Order here: https://www.hcinema.de/lampen/shop-en.php?id=20457

Status: 2011 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details

HCinema

https://www.projector-database.com/pro/optomads329-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.