Optoma EzPro / EP716



Brief Introduction Beta 2.5	The Optoma model EzPro / EP716 is a DLP projector with SVGA 800 x 600 resolution and a contrast of 2000:1. An image width of up to 369 cm is possible. However, the image should be smaller in room light. We recommend max. 246 cm. The model was built by Optoma in 2005 and is no longer current.
Display Type	1 x 0,55" DDR DLP Chip SVGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 1800 / Screen: 582 Lux (bei 203 cm Screen)
Contrast	Projector: 2000:1 full on/off / Screen: 2000:1 full on/off
Black Level	Projector: 0,9000 min. Lumen / Screen: 0.291 min. Lumen
Offset	
Resolution	SVGA 800 x 600 480.000 Pixel SXGA+ 1400 x 1050 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	200W UHP Lamp Articel Nr.: SP.82G01.001
Light Life	3000 h. 4000 h. in Eco Mode
Operating Costs	19,05% / 0,08 €
Focus	Manual
Zoom	Manual 1,2
Objective	F=2,7-3,0 f=21,83-23,81 mm
Throw Ratio	1,95-2,13:1
Audio	1 x 2W Mono
Connections	2 x D-sub 15pin in 1 x out Cinch Video in S-Video in Mini Jack in USB

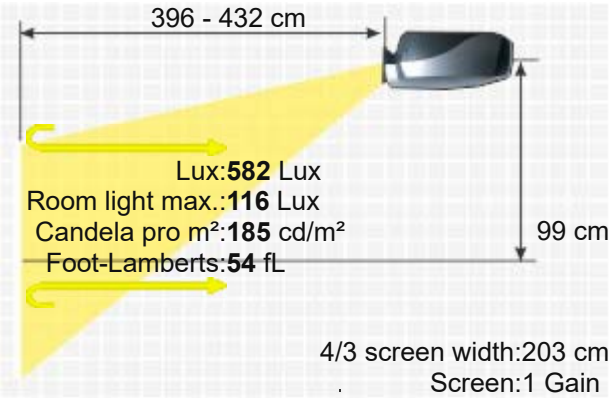

OPTOMA EZPRO / EP716



Ceiling Mounting	Ja
Power	265W / 5W standby
Size WxHxD	230 x 95 x 210 mm (9,1"x3,7"x8,3") 4,59 L/dm³
Operating Noise	32 / 28 dB in Eco Mode



Weight	1,90 kg / 4,19 lbs.
Keystone	Vert.: +/-15°
Illumination	85%
Frequenz	H-sync: 31,5-100 kHz V-sync: 50-85 Hz
Foot-Lamberts	54 fL / max. 369 cm screen width 185 cd/m²

Features
- Freeze
- Eco Mode
- Kensington Slot
- sRGB
- Gamma correction
- Password protection
- Remote control with laser pointer
- De-interlacer with 3:2 2:2 pull down
- Digital Zoom

Optional

Bulb only	NLMP4402
Lamp ruby	Ruby-LMP4402
Lamp original	BL-FU180A / SP.82G01.001 / SP.82G01GC01
Compatible lamp	LMP-K15433
Universal Remote original	Fernb-uni-V3
Remote control original	45.82G01G104
Ceiling Mount 100-120	Halterung100

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n4404

Status: 2005 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details

https://www.projector-database.com/pro/optomaep716-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.