AVVision X1250




3LCD Bild im Bild

Brief Introduction Beta 2.5	The X1250 LCD has 2500 Ansi-Lumen, a contrast of 800:1 and an XGA 1024 x 768 resolution. The projector will be able to illuminate a picture width of 435 cm well. However, if room light is available, the picture width should ideally not exceed 290 cm. It was launched in 2005 and is no longer offered by the manufacturer AVVision.
Display Type	3 x LCD TFT Panel XGA 4/3 Liquid Crystal Display

	Projector	Screen
Ansi-Lumen	2500	833 Lux (bei 200 cm Screen)
Contrast	800:1 full on/off	800:1 full on/off
Black Level	3,1250 min. Lumen	1,045 min. Lumen
Offset	-	

Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	180W Lamp
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,23
Objective	F=1,7-2,1 f=26-32 mm
Throw Ratio	-
Audio	1 x 2W
Connections	DVI in D-sub 15pin in Cinch Video in S-Video in Mini Jack RS232C
Ceiling Mounting	Yes
Power	230W
Size WxHxD	223 x 93 x 297 mm (8,8"x3,7"x11,7") 6,16 L/dm³
Operating Noise	31dB

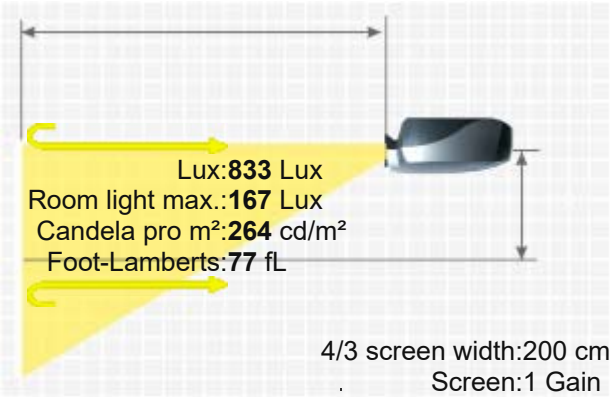

Weight	3,10 kg / 6,83 lbs.
Keystone	Vert.: +/-15°
Illumination	-
Frequenz	-
Foot-Lamberts	77 fL / max. 435 cm screen width 264 cd/m²

AVVISION X1250

Features	■ Freeze ■ Picture-in-Picture ■ Remote control with mouse control ■
Status Data	2005 Discontinued (EOL) // Last update of the data: 2023-08-04
More Details	https://www.projector-database.com/pro/avvisionx1250-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.