Optoma EzPro / EP755A



Brief Introduction Beta 2.5	A brief introduction to the Optoma EzPro / EP755A. The standard portable DLP projector has an XGA 1024 x 768 resolution and a contrast of 600:1. The projector will be able to illuminate a picture width of 389 cm well. However, if room light is available, the image width should ideally not exceed 259 cm. The model was built by Optoma in 2001 and is no longer current.
Display Type	0,7" DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 2000 / Screen: 667 Lux (bei 200 cm Screen)
Contrast	Projector: 600:1 full on/off / Screen: 600:1 full on/off
Black Level	Projector: 3,3333 min. Lumen / Screen: 1,117 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	NTSC (M, 4.43 MHz/3.58 MHz) PAL (B,D,G,H,I,M,N) SECAM (B, D, G, K, K1, L) HDTV 1080i - 720p - 480p/i - 576p/i
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	250W UHP Lamp Articel Nr.: BL-FU250A
Light Life	2000 h.
Operating Costs	23,81% / 0,1 €
Focus	Manual
Zoom	Manual 1,2
Objective	F=2,44-2,69 f=28,8-34,5 mm
Throw Ratio	2,0-2,4:1
Audio	2 x 3W Stereo
Connections	1 x 15-Pin D-Sub in 1 x out 1 x DVI-I in 1 x Audio Mini Jack (für 15-pin D-SUB) 1 x Audio Mini Jack (für DVI) 1 x RS232, 1 x S-Video 1 x Cinch Video, 1 x L/R RCA Audio Input, 1 x Mini Din Audio out 1 x Remote Maus port
Ceiling Mounting	Yes
Power	320W
Size WxHxD	277 x 85 x 225 mm (10,9"x3,3"x8,9") 5,3 L/dm³
Operating Noise	32dB
Weight	2,90 kg / 6,39 lbs.

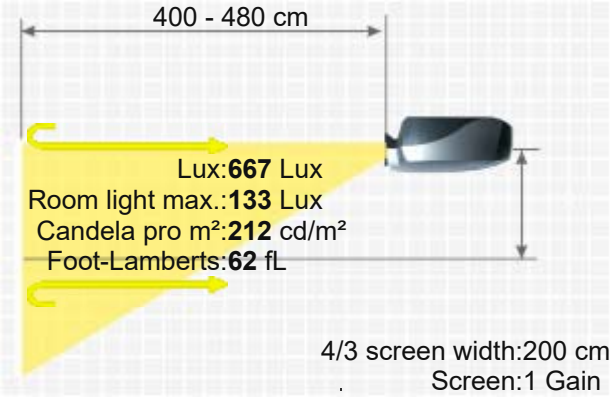



Keystone	Vert.: +/-16°
Illumination	90%
Frequenz	H-sync: 15-100 kHz V-sync: 43-120 Hz Range max.: 160 MHz
Foot-Lamberts	62 fL / max. 389 cm screen width 212 cd/m²
Features	■ Freeze ■ Remote control with laser pointer und mouse control ■



Optional	
Osram bulb only	NLMP15521
Lamp ruby	Ruby-LMP15521
Lamp original	BL-FU250A / SP.86501.001
Universal Remote original	Fernb-uni-V3

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n15520

Status Data: 2001 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details: HCinema https://www.projector-database.com/pro/optomaep755a-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.