Optoma H30 Advanced



Brief Introduction Beta 2.5	The Home Cinema H30 Advanced DLP projector from Optoma has 850 Ansi lumens, a contrast of 3000:1 and a WVGA 854 x 480 resolution. The projector can illuminate an image width of up to 296 cm thanks to the 850 Ansi lumens. In room light, however, the image width should ideally be less than 197 cm. The model was built by Optoma in 2005 and is no longer current.
Display Type	1 x 0,54" DC2 DLP Chip WVGA 16/9 Ti Digital Light Processing Chip
Projector: Ansi-Lumen	850
Projector: Contrast	3000:1 full on/off
Projector: Black Level	0,2833 min. Lumen
Screen	367 Lux (bei 203 cm Screen) 3000:1 full on/off 0.122 min. Lumen
Offset	
Resolution	WVGA 854 x 480 409.920 Pixel
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Disc Recognition	DVD | HD Blu-ray (komprimiert) | ~~3D Blu-ray~~ | ~~4K UHD Blu-ray~~
Application	Homeciname | Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	200W P-VIP Lamp Articel Nr.: SP.80A01.001
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=2,4-2,7 f=19,7-23,6 mm
Throw Ratio	1,65-2,0:1
Audio	No
Connections	DVI-I mit HDCP YUV in Cinch Video in S-Video in RS232C

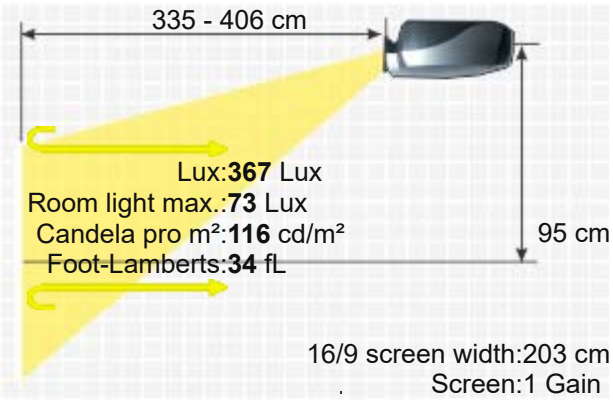

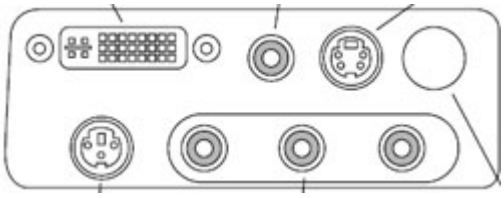

OPTOMA H30 ADVANCED

Ceiling Mounting	Yes
Power	270W
Size WxHxD	272 x 86 x 210 mm (10,7"x3,4"x8,3") 4,91 L/dm³
Operating Noise	32 / 30 dB in Eco Mode

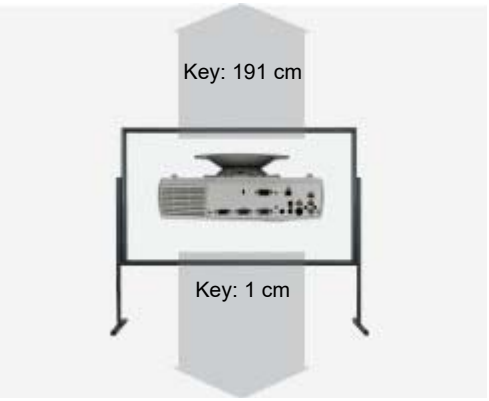

Weight	2,20 kg / 4,85 lbs.
Keystone	Vert.: +/-16°
Illumination	90%
Frequenz	-
Foot-Lamberts	34 fL / max. 296 cm screen width 116 cd/m²
Features	■ Freeze ■ Eco Mode ■ Kensington Slot ■ Gamma correction ■ Digital image shift ■ Remote control with backlight ■ 6 Segment colour wheel 4 speed
Please note	Im englischen Prospekt stimmt der Stromverbrauch nicht. Im deutschen Prospekt wir das Betriebsgeräuch mit einem größeren Abstand gemessen und ist somit weniger.

Optional

Lamp ruby	Ruby-LMP2646
Lamp original	BL-FP180A / SP.80A01.001
Compatible lamp	LMP-K2646
Universal Remote original	Fernb-uni-V3

Order here: https://www.hcinema.de/lampen/shop-en.php?id=d2646

Status: 2005 Discontinued (EOL) // Last update of the data: 2023-08-04

Data





More Details

HCinema

https://www.projector-database.com/pro/optomah30advance-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.