

Optoma HD803/LV

OPTOMA HD803/LV



The Optoma HD803/LV home cinema DLP projector has 1200 Ansi lumens, a contrast of 8000:1 and an HDTV 1920 x 1080 resolution. A picture width of up to 352 cm is possible. However, the picture should be smaller in room light. We recommend max. 235 cm. Playing 1080P is also no problem for the projector. The model was built by Optoma in 2007 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



1 x 0,95" DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 1200

Screen 533 Lux (bei 200 cm Screen)

Contrast

8000:1 full on/off

8000:1 full on/off

Black Level

Offset 0,1500 min. Lumen

0,067 min. Lumen

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D-Blu-ray | 4K-UHD-Blu-ray

Application

Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

300W UHP Lamp

Article Nr.: BL-FS300B /

SP.83C01G.001

Light Life

3000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,6-2,82 f=39,12-46,94 mm

Throw Ratio


1,85-2,22:1

Audio

Nein

Connections

2 x HDMI in
DVI-I mit HDCP in
S-Video in
Cinch Video in
12V Trigger out
RS232C

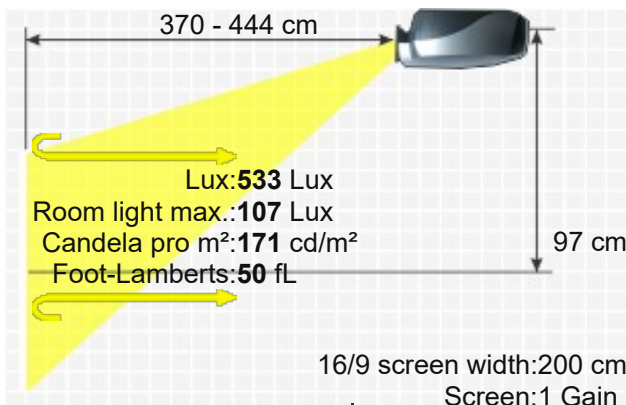



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
430W / 12W standby
406 x 117 x 310 mm (16"x4,6"x12,2") 14,73 L/dm³
32dB

Weight
Keystone
Illumination

4,50 kg / 9,92 lbs.
Vert.: +/-5°
90%

Frequenz

-


Foot-Lamberts

50 fL / max. 352 cm screen width
171 cd/m²

Features

- Full HD 1080P compatible
 - Kensington Slot
 - sRGB
 - Gamma correction
 - Dynamic iris
 - Digital image shift
 - Remote control with backlight
 - Overscan adjustable
 - 7-segment 6-speed colour wheel.
- Optional only Chromecast / Fire TV / Apple TV / Mi Box Ads

Screen Mirroring

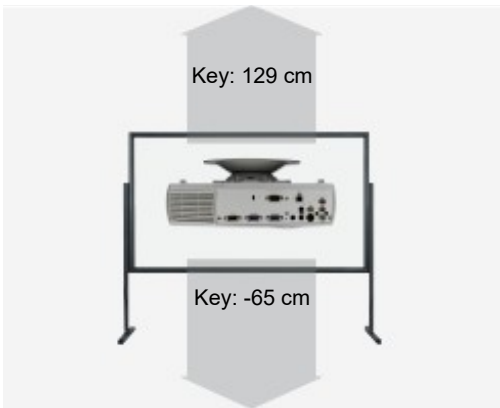

Optional accessories

	Nackte Osram Lampe	NLMP4887	103,58 €
	Lampe Ruby	Ruby-LMP4887	128,12 €
	Lampe Original	BL-FS300B / SP.83C01G.001	EOL €
	Kompatible Lampe	LMP-K16460	69,77 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status Data 2007 Discontinued (EOL) // Last update of the data: 2025-03-03

More Details



HCinema

<https://www.projector-database.com/pro/optomah803-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.