
Optoma HD30



Brief Introduction Beta 2.5	The Optoma HD30 3D BrilliantColor DLP projector has 1600 Ansi lumens, a contrast of 25000:1 and an HDTV 1920 x 1080 resolution. The lamp has a service life of up to 4000 hours, which is over 5.5 years if enjoyed for two hours a day. Thanks to the brightness of 1600 Ansi lumens, a picture width of 406 cm is possible. In room light, the picture should be max. 271 cm wide. The projector can also display 1080P and 3D without any problems. The model was built by Optoma in 2013 and is no longer current.
Display Type	1 x DLP Chip HDTV 16/9 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 1600 / Screen: 711 Lux (bei 200 cm Screen)
Contrast	Projector: 25000:1 full on/off / Screen: 25000:1 full on/off
Black Level	Projector: 0,0640 min. Lumen / Screen: 0,028 min. Lumen
Offset	
Resolution	HDTV 1920 x 1080 2.073.600 Pixel
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
Disc Recognition	DVD | HD Blu-ray | 3D Blu-ray | ~~4K UHD Blu-ray~~
3D Compatibility	Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready)
Application	Homeciname | Small screen width, rooms with very little ambient light below 100 lumens. -
Light Source	Articel Nr.: BL-FU240A / SP.8RU01GC01
Light Life	4000 h. 6000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=2,55-2,87 f=22,4-26,8 mm
Throw Ratio	1,5-1,8:1
Audio	2 x 8W
Connections	2 x HDMI 1.4a in 2 x D-sub 15 pin in 1 x out YUV in Cinch Video in 12V Trigger out RS232C 3D-Sync Out (3-Pin VESA)
Ceiling Mounting	Yes

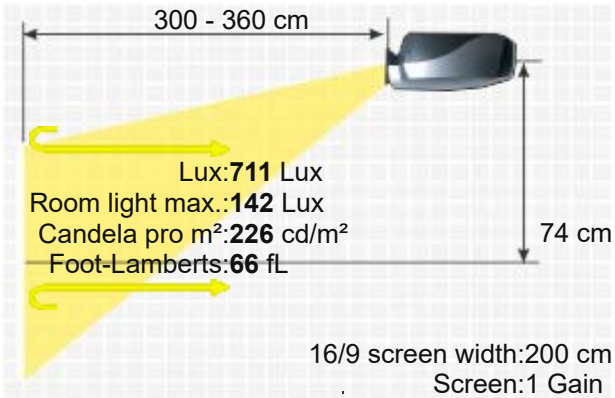

OPTOMA HD30

Power	-
Size WxHxD	324 x 97 x 234 mm (12,8"x3,8"x9,2") 7,35 L/dm³
Operating Noise	-



Weight	3,10 kg / 6,83 lbs.
Keystone	Vert.: +/-20°
Illumination	-
Frequenz	-
Foot-Lamberts	66 fL / max. 406 cm screen width 226 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- BrilliantColor™

Optional


Remote control original	BR-3069B, BR-3037B
Lamp original	BL-FU240A / SP.8RU01GC01

Order here: https://www.hcinema.de/lampen/shop-en.php?id=fro22019

Status

2013 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2013-04-05 11:25:19

Data

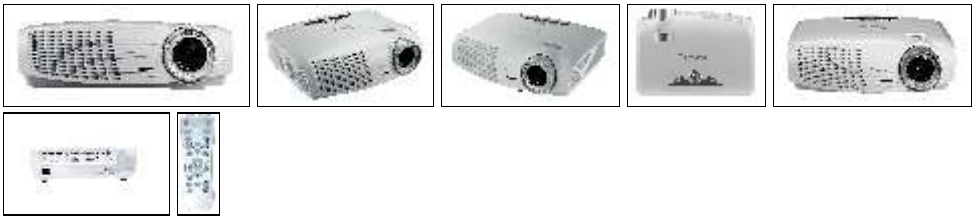

More Details

HCinema
https://www.projector-database.com/pro/optomahd30-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.