MX810ST

Digital Projector





HIGHLIGHTS

-Microphone in with two 10W Speakers
-USB Reader
-USB Display (Plug-n-Play)
-LAN Display
-4-1 Display
-Remote Desktop
-Wireless Display (Optoinal)
-Filter Free Design
-No Color Decay
-Crestron RoomView Compatible
-PJ-Link Compatible
-2500 ANSI Lumens
-XGA Native Resolution
-BrilliantColor™
-3D Color Managment
-VIDI™
-Auto Keystone (Vertical)
-Keystone ± 30 Degree
-6 Segment Color Wheel
-Variable Audio Out
-Closed Captioning

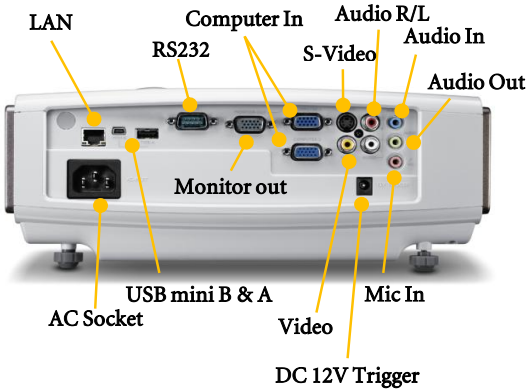

Projection System	DLP® technology by Texas Instruments®		
Native Resolution	XGA (1024 x 768)		
Brightness	2500 ANSI lumens		
Contrast Ratio	4600:1 (Full on/Full off)		
Keystone	Auto Keystone / Manual Vertical ±30°		
Aspect Ratio	4:3 Native (5 aspect ratio Selectable)		
Color	Full 1.07 billion color palette		
Lens	F=2.6		
Zoom Ratio	Fixed		
Image Size (Diagonal)	41" to 300"		
Throw Ratio	0.61:1 (81"@1M)		
Lamp	210W, 3500/5000 hours (Normal/Economic mode)		
Computer Compatibility	VGA(640 x 480) to UXGA(1600 x 1200)		
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p		
Video Compatibility	NTSC, PAL, SECAM		
Horizontal Frequency	31-99 kHz		
Vertical Scan Rate	48-120 Hz		
Input Terminals	PC	Analog RGB: D-sub 15 pin x 2 (Shared with Component)	
		LAN Networking: RJ-45 x1 (LAN Display)	
		USB Type A x1 (USB Reader), Type Mini-B x1 (USB Display)	
	A/V	S-Video: Mini Din 4 pin x 1	
		Composite Video: RCA x 1	
		Microphone: Stereo Mini Jack x1	
		Audio L/R : RCA x 2	
		Stereo Mini Jack x 1	
Output Terminals	PC	Monitor out: D-sub 15 pin x 1	
	Audio	Variable Audio Out : Stereo Mini Jack x 1	
		Speaker: 10W x 2	
Control Terminal	Serial Connector : RS232 9 pin x 1		
	RJ45 x 1 (LAN Control)		
	USB Type Mini-B x1 (Page up/down)		
Dimensions(W x H x D)	11.4 x 5.03 x 9.9 inch (290 x 128 x 252 mm) with Lens		
Weight	7.5 lbs (3.4kg)		
Power Supply	AC 100 to 240 V, 50/60 Hz		
Power Consumption	Typical 296W, Standby < 1W		
Audible Noise	35/30 dB (Normal/Economic mode)		
On-Screen Display Languages	Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (26 Languages)		
Picture Modes	Dynamic Mode	Presentation Mode	
	sRGB Mode	Cinema Mode	
	User 1 Mode	User 2 Mode	
Functions	BrilliantColor™	Blank	
	VIDI™	Panel Key Lock	
	3D Color Management	Auto Off	
	Crestron LAN Control	Security Password	
	Closed Captioning	HDTV compatible	
	Digital Zoom (x2)	High Altitude Mode	
	Variable Audio Out	"Q?" Hot Key for FAQ	
	Quick Cooling	3D Ready	
	Quick Auto Search	Freeze	
	Closed Captioning	Quick Auto Search	
	Quick Cooling	PJLink Compatible	
Accessories (Standard)	Quick Start Guide	VGA Cable	
	Manual CD	Power Cord	
	Remote Control w/battery		
Accessories (Optional)	Presentation Plus	Spare Lamp Kit	
	Wall Mount	Wireless Dongle	
	RS232 Cable	Carry Case	