Optoma HD808



Brief Introduction Beta 2.5	A brief introduction to the HD808: The Optoma DLP projector offers 1200 Ansi-Lumen, a contrast of 15000:1 and a HDTV 1920 x 1080 resolution. Including a lens shift and keystone correction function, which provides freedom during installation. 352 cm image width, the projector will be able to illuminate well. However, if room light is available, the picture width should ideally not exceed 235 cm. It is also Full HD 1080P compatible. With only 26 decibels of operating noise, the model is already very quiet compared to others. The model was built by Optoma in 2009 and is no longer current.
Display Type	1 x 0,65" DLP Chip HDTV 16/9 Ti Digital Light Processing Chip
Projector: Ansi-Lumen	1200
Projector: Contrast	15000:1 full on/off
Projector: Black Level	0,0800 min. Lumen
Screen	533 Lux (200 cm Screen width) 15000:1 full on/off 0,036 min. Lumen
Lens shift	Vert.: +80% --55% Hori.: +/-15%
Resolution	HDTV 1920 x 1080 2.073.600 Pixel
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Disc Recognition	DVD | HD Blu-ray | ~~3D Blu-ray~~ | ~~4K UHD Blu-ray~~
Application	Homeciname | Small screen width, rooms with very little ambient light below 100 lumens. -
Light Source	Article Nr.: BL-FU220D / SP.8AF01GC01
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,53
Objective	-
Throw Ratio	1,49-2,28:1
Audio	-
Connections	HDMI 1.3 in DVI-D mit HDCP in D-sub 15 pin in YUV in S-Video in Cinch Video in 12V Trigger out RS232C
Ceiling Mounting	-
Power	345W
Size WxHxD	490 x 194 x 371 mm (19,3"x7,6"x14,6") 35,27 L/dm³
Operating Noise	26 / 22 dB in Eco Mode
Weight	8,40 kg / 17,64 lbs.
Keystone	Vert.: +/-5°
Illumination	80%

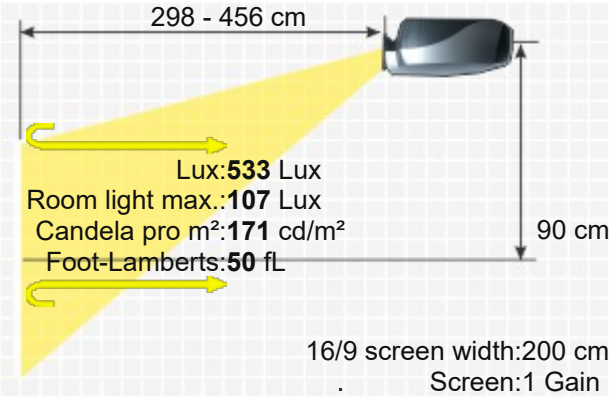

OPTOMA HD808

Frequenz	-
Foot-Lamberts	50 fL / max. 352 cm screen width 171 cd/m²
Features	■ Full HD 1080P compatible ■ Lens shift Funktion ■ Eco Mode ■ Kensington Slot
Screen Mirroring	Optional only Chromecast / Fire TV / Apple TV / Mi Box Ads

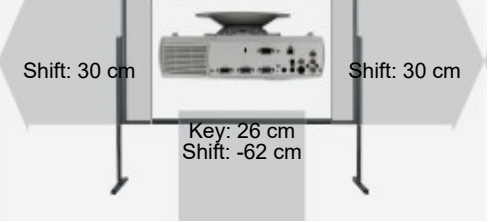

Optional accessories

	Nackte Osram Lampe	NLMP18757	67,78 €
	Lampe Original	BL-FU220D / SP.8AF01GC01	EOL €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	BR-3041B, 45.8AF01G001	44,64 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status Data 2009 Discontinued (EOL) // Last update of the data: 2025-10-27

More Details

HCinema

https://www.projector-database.com/pro/optomahd808-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.