
Benq SL 710X

BENQ SL 710X

Brief Introduction Beta 2.5	With the SL 710X, manufacturer Benq offers a standard portable DLP projector with XGA 1024 x 768 resolution and a contrast of 400:1. An image width of up to 275 cm is possible. However, the image should be smaller in room light. We recommend max. 183 cm. It was launched in 2001 and is no longer offered by the manufacturer Benq.
Display Type	1 x DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 1000 / Screen: 333 Lux (bei 200 cm Screen)
Contrast	Projector: 400:1 full on/off / Screen: 400:1 full on/off
Black Level	Projector: 2,5000 min. Lumen / Screen: 0,839 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	NTSC PAL SECAM
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	120W P-VIP Lamp Articel Nr.: 60.J1331.001
Light Life	1500 h.
Operating Costs	-
Focus	Manual
Zoom	Manual
Objective	-
Throw Ratio	-
Audio	-
Connections	D-sub 15pin in S-Video in Cinch Video in
Ceiling Mounting	-
Power	250W
Size WxHxD	-
Operating Noise	-
Weight	-
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	31 fL / max. 275 cm screen width 106 cd/m²
Features	-

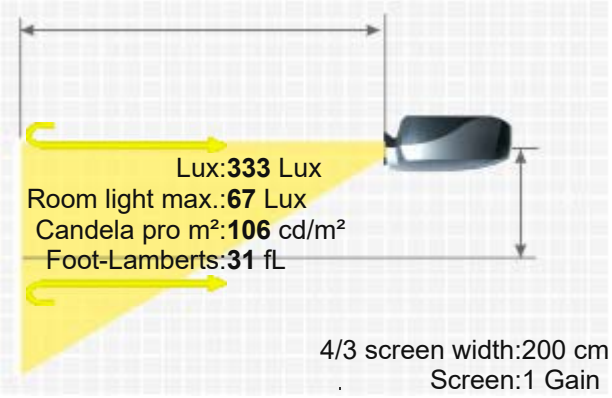

Optional

Osram bulb only	NLMP577
Bulb only	NLMP231
Lamp ruby	Ruby-LMP231
Lamp original	60.J1331.001
Lamp original	60.J2203.CB1
Compatible lamp	LMP-K231
Remote original	MC.JMV11.00G

Universal Remote original Fernb-uni-V3

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n16757

Status Data 2001 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

https://www.projector-database.com/pro/benqsl710x-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.