
Bonitor MP302



Pocket LED

Display Type	1 x LCoS Panel 4/3 Liquid Crystal on Silicon (LCOS)		
Ansi-Lumen	15		5 Lux (bei 200 cm Screen)
Contrast	-		-
Black Level	-		-
Offset	-		
Resolution	-		
Video Modes	WUXGA 1920 x 1200 compressed		
Application	PAL, SECAM, NTSC,		
Light Source	Game-Portabel | Very portable, small-screen projections. Very narrow picture width and rooms with very little light.		
Light Life	RGB LED		
Operating Costs	30000 h.		
Focus	0,00 € LED		
Zoom	Manual		
Objective	No Zoom		
Throw Ratio	-		
Audio	1,62:1		
Connections	-		
Ceiling Mounting	-		
Power	-		
Size WxHxD	-		
Operating Noise	100 x 25 x 35 mm (3,9"x1"x1,4") 0,09 L/dm³		

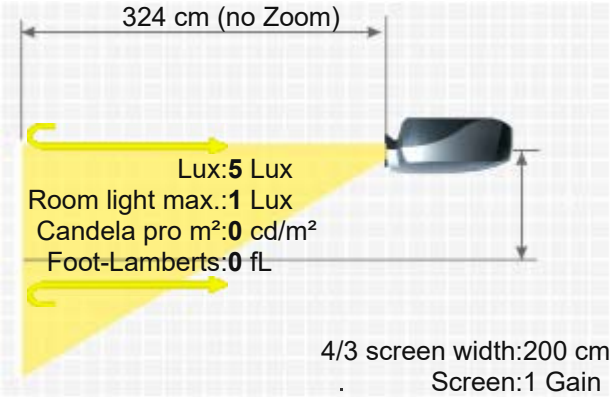

Weight	0,110 kg / 0,24 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	-
	-
Features	-
Status	2010 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

HCinema

https://www.projector-database.com/pro/bonitormp302-en.html

BONITOR MP302

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.