

Optoma MovieTime DV10

OPTOMA MOVIE TIME DV10



Brief Introduction

Beta 2.5

The Optoma MovieTime DV10 model is a DLP projector with WVGA 854 x 480 resolution and a contrast of 4000:1. The integrated media player allows files to be played directly. 1000 Ansi lumens ensure that a picture width of 321 cm is also possible. However, if room light is available, the picture should be a maximum of 214 cm wide. The operating noise of only 28 decibels makes the projection quiet. The model was built by Optoma in 2005 and is no longer current, but is still very popular in our projector database.

 1 x 0,54" DC2 12 Grad DLP Chip
WVGA 16/9 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Projector	1000	Screen	444 Lux (200 cm Screen width)
	4000:1 full on/off		4000:1 full on/off
	0,2500 min. Lumen		0,111 min. Lumen

Resolution

WVGA 854 x 480
409.920 Pixel
SXGA+ 1400 x 1050 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Media player formats: DVD, VCD, SVCD, HDCD, CD, MP3, WMA, Kodak PhotoCD, JPEG
DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray
Application
Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

200W Lamp
Article Nr.: SP.81R01G001
2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,13

Objective

f=15-17 mm

Throw Ratio


1,26-1,41:1

Audio

2 x 5W Stereo

Connections

D-sub 15pin in
S-Video in
Cinch Video in
Cinch Stereo in
Mini jack Audio out
Optisch Audio out
RS232C

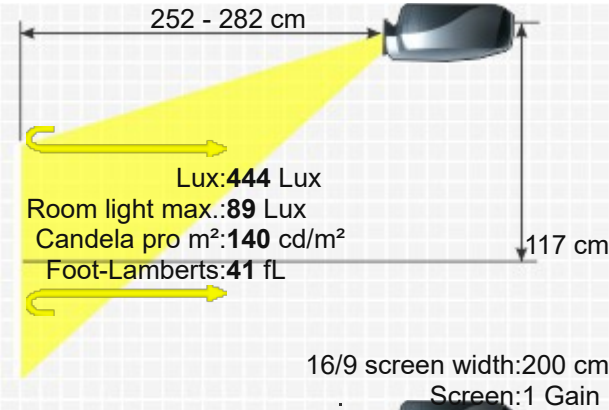



Ceiling Mounting	No, is not possible.	
Power	285W / 10W standby	
Size WxHxD	368 x 117 x 273 mm (14,5"x4,6"x10,7") 11,75 L/dm³	
Operating Noise	28 / 27 dB in Eco Mode	Key: 189 cm

Weight	3,53 kg / 7,78 lbs.	
Keystone	Vert.: +/-16°	
Illumination	90%	
Frequenz	H-sync: 31,5-100 kHz V-sync: 43-120 Hz	Key: -45 cm

Foot-Lamberts	41 fL / max. 321 cm screen width 140 cd/m²	
Features	■ Integrated Mediaplayer ■ Eco Mode ■ Kensington Slot ■ sRGB ■ Gamma correction ■ Digital image shift ■ Password protection ■ Overscan adjustable ■ Stromverbrauch wird im Prospekt englisch 2 nur mit 180W angegeben.	
Screen Mirroring	-	
In Test	-	
Please note	Power consumption is only given as 180W in the English brochure 2.	

Optional accessories

	Nackte Lampe	NLMP2640	109,78 €
	Lampe Ruby	Ruby-LMP2640	92,24 €
	Lampe Original	BL-FP200B / SP.81R01G.001	EOL €
	Kompatible Lampe	LMP-K2640	72,66 €
	Fernbedienung Original	45.81R01.001	EOL €

Status 2005 Discontinued (EOL) // Last update of the data: 2026-06-09



More Details



HCinema

<https://www.projector-database.com/pro/optomamovietimedv10-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.