
Optoma S302



OPTOMA S302

Brief Introduction Beta 2.5	With the S302, manufacturer Optoma offers a standard portable DLP projector with SVGA 800 x 600 resolution and a contrast of 15000:1. The lamp in the projector is specified with a lamp life of 4500 hours, which is over 6.2 years with a daily viewing time of 2 hours. A picture width of up to 477 cm is possible. However, the picture should be smaller in room light. We recommend max. 318 cm. It is also Full HD 1080P compatible. The model was built by Optoma in 2013 and is no longer current.
Display Type	1 x 0,55" DC3 DLP Chip SVGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 3000 / Screen: 1000 Lux (bei 200 cm Screen)
Contrast	Projector: 15000:1 full on/off / Screen: 15000:1 full on/off
Black Level	Projector: 0,2000 min. Lumen / Screen: 0,067 min. Lumen
Offset	
Resolution	SVGA 800 x 600 480.000 Pixel UXGA 1600 x 1200 compressed
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
3D Compatibility	Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready)
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	190W Lamp Articel Nr.: PQ484-2401 / BL-FU190C / PQ684-2400 / BL-FU190F
Light Life	4500 h. 6500 h. in Eco Mode
Operating Costs	9,52% / 0,04 €
Focus	Manual
Zoom	Manual 1,1
Objective	F=2,51-2,69 f=21,95-24,18 mm
Throw Ratio	1,97-2,15:1
Audio	1 x 2W
Connections	2 x D-sub 15 pin in 1 x out S-Video in Cinch Video in Mini Jack Audio in und out RS232C Din 9 pin in USB Typ B

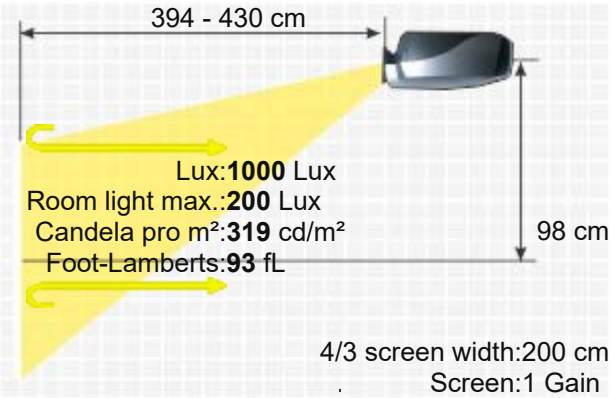

Ceiling Mounting	Yes
Power	226 /194W in Eco Mode
Size WxHxD	316 x 124 x 224 mm (12,4"x4,9"x8,8") 8,78 L/dm³
Operating Noise	26 dB in Eco Mode



Weight	2,21 kg / 4,87 lbs.
Keystone	Vert.: +/-40°
Illumination	85%
Frequenz	H-sync: 24-85 kHz V-sync: 15,3-91 Hz
Foot-Lamberts	93 fL / max. 477 cm screen width 319 cd/m²

Features

- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- sRGB
- Password protection
- BrilliantColor™

Optional

Lamp original	PQ484-2401 / BL-FU190C / PQ684-2400 / BL-FU190F
Remote control original	BR-5043N, BR-5046L, OP.45.8QJ01G001, BR-5048N

Order here: https://www.hcinema.de/lampen/shop-en.php?id=22032

Status

2013 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2013-08-19 14:10:31

Data



More Details

https://www.projector-database.com/pro/optomas302-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.