

Boxlight CP 670k





Display Type	3 x 0,79" LCD TFT Panel SVGA 4/3 Liquid Crystal Display		
Ansi-Lumen	Projector	Screen	Lux (bei 200 cm Screen)
Contrast	450:1 full on/off		-
Black Level	-		-
Offset	-		
Resolution	SVGA 800 x 600 480.000 Pixel SXGA 1280 x 1024 compressed		
Video Modes	PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i,		
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Very narrow picture width and rooms with very little light.		
Light Source	165W EHPL Lamp Articel Nr.: CP670K-930		
Light Life	2000 h.		
Operating Costs	-		
Focus	manuell		
Zoom	Manual 1,23		
Objective	F=1,7-2,1 f=26-32 mm		
Throw Ratio	1,63-2,04:1		
Audio	2W		
Connections	DVI-I mit HDCP D-sub 15pin out Cinch Video in S-Video in Mini Jack		
Ceiling Mounting	Yes		
Power	230W		
Size WxHxD	294 x 92,9 x 231 mm (11,6"x3,7"x9,1") 6,25 L/dm³		
Operating Noise	37dB		
Weight	3,10 kg / 6,83 lbs.		
Keystone	Vert.: +/-15° Hori.: +/-10°		
Illumination	-		
Frequenz	H-sync: 15-80 kHz V-sync: 43-85 Hz		
Foot-Lamberts	-		
	-		
Features	■ Freeze ■ Kensington Slot ■ Picture-in-Picture ■		
Please note	-		
Status	2004 Discontinued (EOL) // Last update of the data: 2023-08-04		

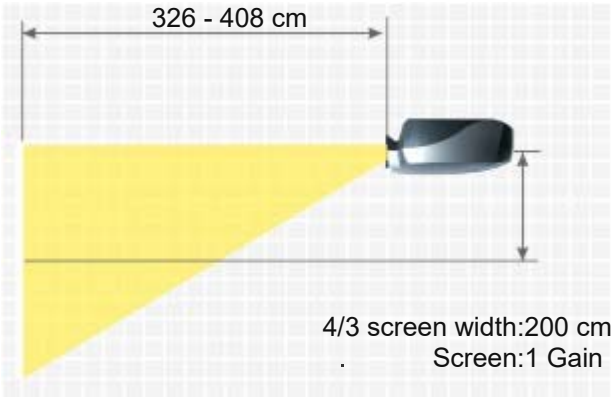

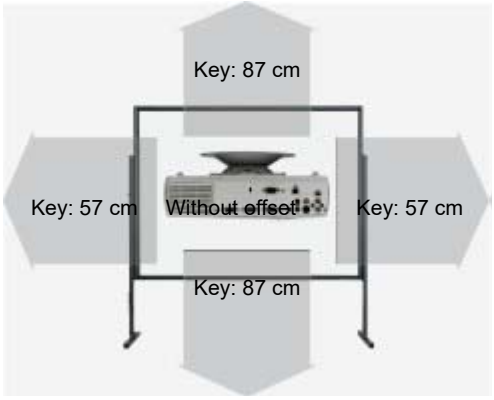

BOXLIGHT CP 670K

Data

More Details



HCinema

https://www.projector-database.com/pro/boxlightcp670k-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.