Optoma TX779P 3D



Brief Introduction Beta 2.5	The Optoma TX779P 3D model is a DLP projector with XGA 1024 x 768 resolution and a contrast of 3000:1. The projector will be able to illuminate a picture width of 616 cm well. Rooms with residual light can be created by the projector with a smaller image width, max. 411 cm is recommended here. Furthermore, the projector can play 1080P without any problems. The projector is very quiet compared to others with an operating noise of 30 decibels. The model was built by Optoma in 2011 and is no longer current.
Display Type	1 x 0,7" DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 5000 / Screen: 1667 Lux (bei 200 cm Screen)
Contrast	Projector: 3000:1 full on/off / Screen: 3000:1 full on/off
Black Level	Projector: 1,6667 min. Lumen / Screen: 0,556 min. Lumen
Offset	
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
3D Compatibility	Frame Sequential (3D Ready) — 120Hz Frame Sequential 3D for Resolutions Up to 720p, 60Hz Field Sequential 3D for Resolutions Up to 480i
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	300W P-VIP Lamp Articel Nr.: BL-FS300C
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	38,1% / 0,16 €
Focus	Manual
Zoom	Manual 1,17
Objective	F=2,6-2,81 f=26,9-29,8 mm
Throw Ratio	1,8-2,1:1
Audio	3W
Connections	HDMI in 2 x D-sub 15 pin in 1 x out S-Video in Cinch Video in RS232C RJ45 12V Trigger out

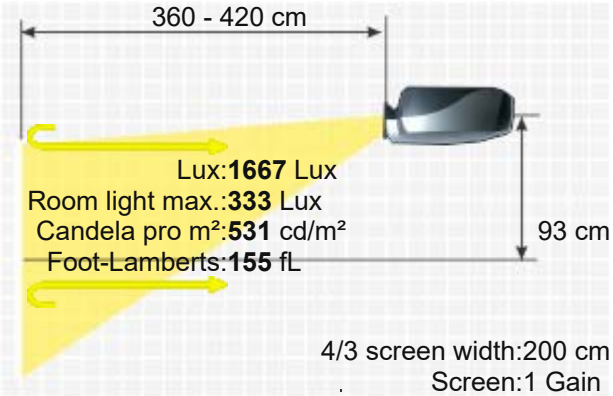

OPTOMA TX779P 3D

Ceiling Mounting	Yes
Power	380 / 320W in Eco Mode
Size WxHxD	326 x 109 x 259 mm (12,8"x4,3"x10,2") 9,2 L/dm³
Operating Noise	30 / 28 dB in Eco Mode

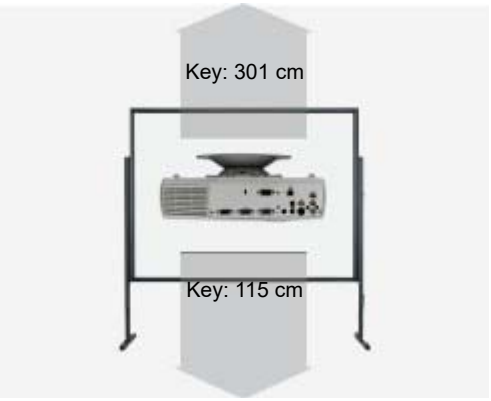

Weight	3,53 kg / 7,78 lbs.
Keystone	Vert.: +/-30°
Illumination	80%
Frequenz	H-sync: 15,31-90 kHz V-sync: 50-120 Hz
Foot-Lamberts	155 fL / max. 616 cm screen width 531 cd/m²

Features

- Full HD 1080P compatible
- Freeze
- Blackboard Modus
- Eco Mode
- Kensington Slot
- sRGB
- Gamma correction
- Digital image shift
- Password protection
- Remote control with laser pointer und mouse control
- Control via web browser
- Lan network compatible.
- Crestron®-Software compatible.

Optional

Remote control original	BR-5023L / BR-3057L / BR-5029L / BR-5030L / BR-5033L
Lamp original	BL-FS300C

Order here: https://www.hcinema.de/lampen/shop-en.php?id=fro20586

Status: 2011 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details

https://www.projector-database.com/pro/optomatx779p3d-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.