Boxlight CP 725c

Brief Introduction Beta 2.5	The Boxlight model CP 725c is a DLP projector with XGA 1024 x 768 resolution and a contrast of 600:1. 2000 Ansi lumens ensure that a picture width of 389 cm is also possible. However, if room light is available, the picture should be max. 259 cm wide. This model is no longer offered by Boxlight.	
Display Type	1 x DLP Chip XGA 4/3 Ti Digital Light Processing Chip	
Ansi-Lumen	Projector: 2000	Screen: 647 Lux (bei 203 cm Screen)
Contrast	Projector: 600:1 full on/off	Screen: 600:1 full on/off
Black Level	Projector: 3,3333 min. Lumen	Screen: 1.084 min. Lumen
Offset	-	
Resolution	XGA 1024 x 768 786.432 Pixel	
Video Modes	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM 1080i, 720p, 480i, 480p	
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.	
Light Source	210W NSH Lamp	
Light Life	1500 h.	
Operating Costs	-	
Focus	Manual	
Zoom	Manual 1,2	
Objective	F=2,6-3,1 f=23-27,6 mm	
Throw Ratio	-	
Audio	1 x 3W Stereo	
Connections	**Inputs:** 1 15-pin computer, 1-RCA component video, 1-S-video, 1-composite video, 1-RCA (L/R) audio, 1-computer mini-jack Video **Outputs:** 1 15-pin computer, control port for RS232C control, USB for Maus operation	
Ceiling Mounting	Yes	
Power	330W	
Size WxHxD	307,3 x 94 x 238,8 mm (12,1"x3,7"x9,4") 6,87 L/dm³	
Operating Noise	-	

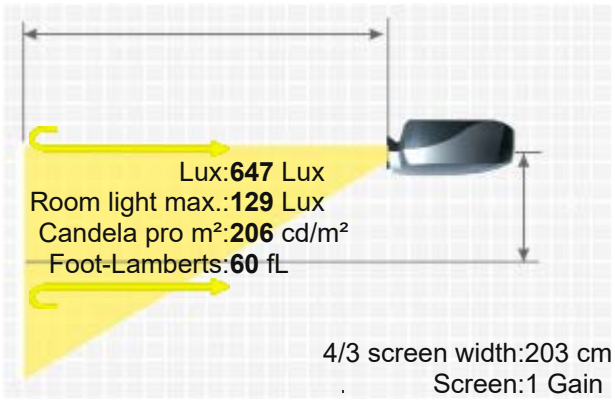

Weight	3,08 kg / 6,79 lbs.
Keystone	Vert.: +/-7°
Illumination	-
Frequenz	H-sync: 20-88 kHz V-sync: 20-100 Hz
Foot-Lamberts	60 fL / max. 389 cm screen width 206 cd/m²
Features	Remote control with laser pointer
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	
More Details	https://www.projector-database.com/pro/boxlightcp725c-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

BOXLIGHT CP 725C