

# Optoma UHD380x

OPTOMA UHD380X



The home cinema UHD380x 3D DLP has 3500 Ansi lumens, a contrast of 500000:1 and a 4KESHIFT 2716 x 1528 4,150,048 pixel resolution. The manufacturer specifies a lamp life of 10,000 hours, which is over 13.7 years if enjoyed for two hours every day. The projector is equipped with an integrated media player, so direct playback of files will not be a problem. The projector also offers a lens shift function that makes image adjustment childs play. The projector can illuminate images up to 601 cm wide thanks to its 3500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 401 cm. Video signals 1080P and 4K as well as 3D are also no problem for the projector, meaning that all Blu-ray formats currently available can be recognized by the projector. The model was built by Optoma in 2019 and is no longer current, but is still very popular in our projector database.

## Brief Introduction

## Display Type

1 x DLP Chip  
4KESH 16/9 Ti Digital Light Processing Chip

## Ansi-Lumen

3500 1556 Lux (bei 200 cm Screen)

## Contrast

500000:1 full on/off 500000:1 full on/off

## Black Level

0,0070 min. Lumen 0,003 min. Lumen

## Lens shift

Vert.: +75% --65%

## Resolution

4KESHIFT 2716 x 1528 4.150.048 Pixel  
(4K2K) 3840 x 2160 mit E-Shift

## Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, 3D, EDTV 480p, 576p  
**Media player formats:** MPG, MPEG MOV, MP4, MKV AVI, MOV, MP4 AVI, MP4, MOV, MKV WMV, ASF 3GP, MP4, AVI, MOV MP4, MOV, MKV MKV MP4, MOV, TS, TRP, TP PDF Word Excel Excel

## Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray (60p)

## 3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom  
Frame Sequential (3D Ready)

## Application

Homecinema | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

## Light Source

240W Lamp

## Light Life

Articel Nr.: BL-FP240E / SP.78V01GC01

4000 h. 10000 h. in Eco Mode

## Operating Costs

6,85% / 0,05 €

## Focus

Manual

## Zoom

Manual 1,31

## Objective


-

## Throw Ratio

1,21-1,59:1

## Audio

5W

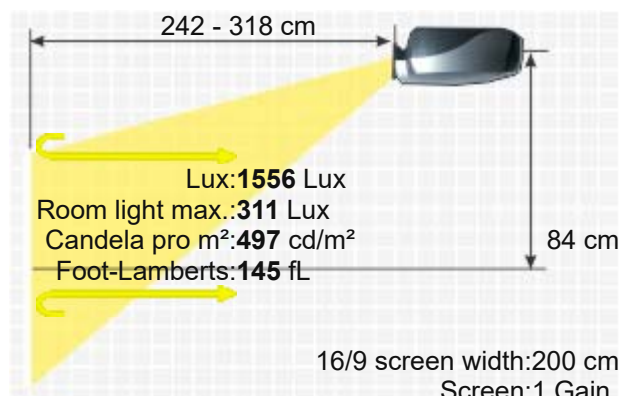

2 x HDMI 2.0 in  
D-sub 15pin in  
Mini Jack Audio in und out  
USB Typ A in  
RS232C Din 9 pin in  
RJ45 in  
12V Trigger out  
1 x USB-A Wireless Alexa

Connections



Ceiling Mounting

Yes

Power

305 / 249W in Eco Mode

Size WxHxD

392 x 118 x 281 mm (15,4"x4,6"x11,1") 13 L/dm³

Operating Noise

25 dB in Eco Mode



Weight

5,22 kg / 11,02 lbs.

Keystone

-

Illumination

75%

Frequenz

H-sync: 31-135 kHz

V-sync: 24-120 Hz

Foot-Lamberts

145 fL / max. 601 cm screen width

497 cd/m²

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Integrated Mediaplayer
- Eco Mode
- Lan network compatible.
- Wireless Alexa

Features

Remote control original

BR-3071N / BT16063

Optional

Lamp original

BL-FP240E / SP.78V01GC01


Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro9002534>

Status

2019 Discontinued (EOL) // Last update of the data: 2023-08-30

Created: 2019-11-07 12:32:03

Data

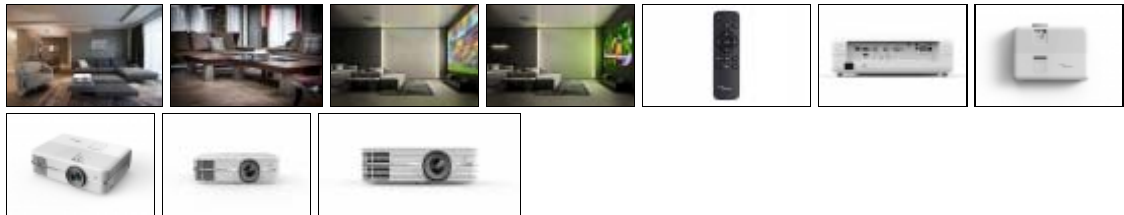

More Details



# HCinema

<https://www.projector-database.com/pro/optomauhd380x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.