Optoma W335

EAN/UPC:796435 44 249 1



Brief Introduction Beta 2.5	The Optoma W335 standard portable 3D BrilliantColor DLP projector has 3800 Ansi lumens, a contrast of 22000:1 and a WXGA 1280 x 800 resolution. The manufacturer specifies a lamp life of 15000 hours, which is equivalent to over 20.5 years at 2 hours per day. A picture width of up to 626 cm is possible, if the picture width is smaller (we recommend max. 417 cm), rooms with residual light are also no problem. Playing 1080P and 3D is also no problem for the projector. The projector is very quiet compared to other projectors with an operating noise of 27 decibels. The model was built by Optoma in 2018 and is no longer current.
Display Type	0,65" DMD Chip WXGA 16/10 Ti Digital Light Processing Chip
Projector: Ansi-Lumen	3800
Projector: Contrast	22000:1
Projector: Black Level Offset	0,1727 min. Lumen
Screen	1520 Lux (bei 200 cm Screen) 22000:1 0,069 min. Lumen
Resolution	WXGA 1280 x 800 1.024.000 Pixel WUXGA 1920 x 1200 compressed
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
3D Compatibility	Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready)
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	203W Lamp Articel Nr.: BL-FU200D / SP.7D101GC01
Light Life	6000 h. / 15000 h. Eco Mode
Operating Costs	7,14% / 0,03 €
Focus	Manual
Zoom	Manual 1,1
Objective	F=2,41-2,53 f=21,85-24 mm
Throw Ratio	1,94-2,16:1
Audio	10W
Connections	HDMI in v1.4a D-sub 15pin in und out Cinch Video in

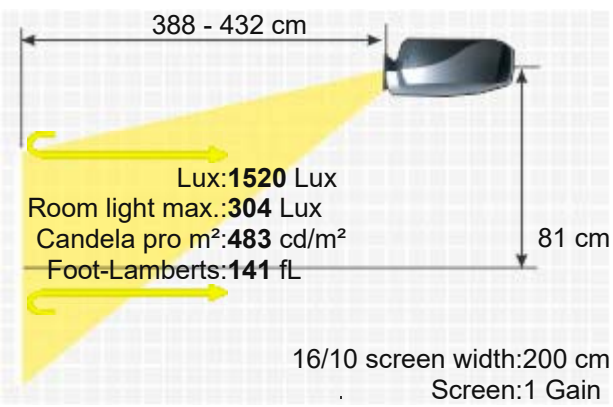

OPTOMA W335

	Mini Jack Audio in und out USB RS232C Din 9 pin in
Ceiling Mounting	Yes
Power	-
Size WxHxD	315 x 99,1 x 243,8 mm (12,4"x3,9"x9,6") 7,58 L/dm³
Operating Noise	27dB
Weight	3,04 kg / 6,7 lbs.
Keystone	Vert.: +/-40°
Illumination	-
Frequenz	H-sync: 15,3-91,1 kHz V-sync: 50-120 Hz
Foot-Lamberts	141 fL / max. 626 cm screen width 483 cd/m²
Features	■ Real Full HD 3D ■ Full HD 1080P compatible ■ Eco Mode ■ Kensington Slot ■ BrilliantColor™
Optional	Remote control original: BR-3079N, 45.71P01G002 Lamp original: BL-FU200D / SP.7D101GC01
Status	Order here: https://www.hcinema.de/lampen/shop-en.php?id=fro24719 2018 Discontinued (EOL) // Last update of the data: 2023-09-20 Created: 2018-08-20 21:39:01
Data	
More Details	HCinema https://www.projector-database.com/pro/optomaw335-en.html



Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.