
Optoma W504




OPTOMA W504

Brief Introduction Beta 2.5	The Optoma model W504 is a DLP projector with WXGA 1280 x 800 resolution and a contrast of 15000:1. An image width of up to 718 cm is possible, if the image width is smaller (we recommend max. 479 cm), rooms with residual light are also no problem. With the HDMI MHL port, the smartphone image can be transmitted to the projector in Full HD at 60 Hz by screen mirroring and the smartphone is charged at the same time. It is also Full HD 1080P and 3D compatible. The model was built by Optoma in 2016 and is no longer current.
Display Type	1 x 0,65" DLP Chip WXGA 16/10 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 5000 / Screen: 2000 Lux (bei 200 cm Screen)
Contrast	Projector: 15000:1 full on/off / Screen: 15000:1 full on/off
Black Level	Projector: 0,3333 min. Lumen / Screen: 0,133 min. Lumen
Offset	-
Resolution	WXGA 1280 x 800 1.024.000 Pixel UXGA 1600 x 1200 compressed
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
3D Compatibility	Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready)
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	310W Lamp Articel Nr.: SP.70B01GC01 / BL-FU310D
Light Life	3000 h. 5000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,56
Objective	F=2,5-3,26 f=20,91-32,63 mm
Throw Ratio	1,49-2,33:1
Audio	2 x 16W
Connections	3 x HDMI 1.4a mit MHL in D-sub 15pin in und out YUV in Mini Jack Audio in und out USB Typ A in RS232C Din 9 pin in RJ45 in

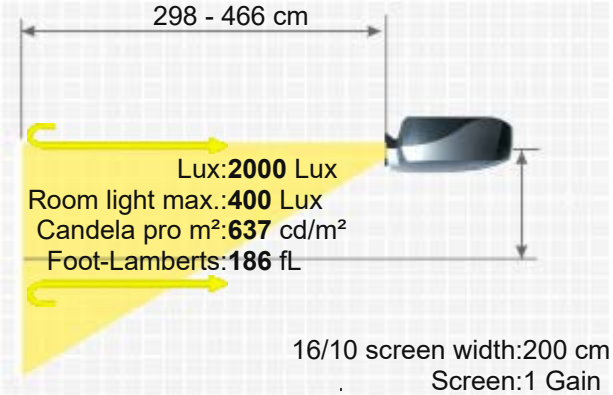

Ceiling Mounting	Yes
Power	365 / 287W in Eco Mode
Size WxHxD	369 x 132 x 295 mm (14,5"x5,2"x11,6") 14,37 L/dm³
Operating Noise	30 dB in Eco Mode

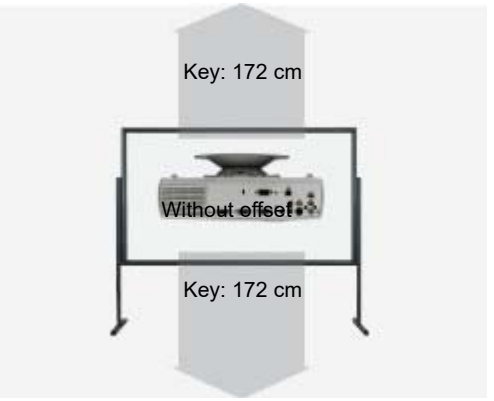

Weight	4,60 kg / 10,14 lbs.
Keystone	Vert.: +/-30°
Illumination	85%
Frequenz	H-sync: 15,3-91,14 kHz V-sync: 24-85 Hz
Foot-Lamberts	186 fL / max. 718 cm screen width 637 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Password protection
- BrilliantColor™
- PJLink™
- Lan network compatible.
- Crestron®-Software compatible.

Optional

Lamp original	SP.70B01GC01 / BL-FU310D
Remote control original	BR-5053C/BR-5080C/SP.72702GC01

Order here: https://www.hcinema.de/lampen/shop-en.php?id=23979

Status

2016 Discontinued (EOL) // Last update of the data: 2023-09-20
Created: 2016-02-04 11:27:50

Data



More Details

https://www.projector-database.com/pro/optomaw504-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.