
Boxlight Pro1010



BOXLIGHT PRO1010

Brief Introduction Beta 2.5	A brief introduction to the Boxlight Pro1010. The standard portable DLP projector has an XGA 1024 x 768 resolution and a contrast of 1200:1. An image width of up to 493 cm is possible. However, the picture should be smaller in room light. We recommend max. 329 cm. The model is no longer offered by Boxlight. Unfortunately, we can no longer offer replacement lamps for this model, neither originals nor replicas.
Display Type	1 x DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 3200 / 2500 im Eco Mode — Screen: 1067 Lux (bei 200 cm Screen)
Contrast	Projector: 1200:1 full on/off — Screen: 1200:1 full on/off
Black Level	Projector: 2,6667 min. Lumen — Screen: 0,891 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	250W Lamp Articel Nr.: PRO1010-930
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual
Objective	-
Throw Ratio	-
Audio	-
Connections	1 x Component 1 x RCA Video 1 x DVI-I 1 x D-Sub 15pin
Ceiling Mounting	-
Power	340W
Size WxHxD	221 x 81,3 x 284,5 mm (8,7"x3,2"x11,2") 5,08 L/dm³
Operating Noise	37 / 35 dB in Eco Mode

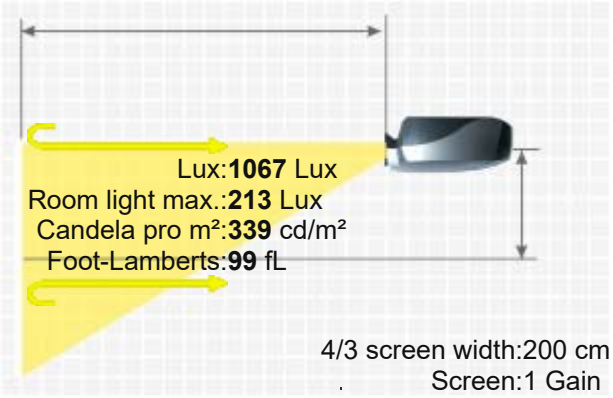

Weight	3,08 kg / 6,79 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-30 kHz V-sync: 50-85 Hz
Foot-Lamberts	99 fL / max. 493 cm screen width 339 cd/m²
Features	■ Eco Mode

Status - Discontinued (EOL) // Last update of the data: 2023-08-04
Data

More Details

HCinema
https://www.projector-database.com/pro/boxlightpro1010-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.