INTERACTIVE PROJECTOR

ProjectoWrite6 WX31NST

Specifications

Model	P6 WX31NST
Technology	.59" 3 x TFT LCD panels
Brightness	3100 lumens (standard) / 2200 lumens (economy)
Native Resolution	1280 x 800 (WXGA)
Supported Resolution	up to 1600 x 1200 (UXGA)
Brightness Uniformity	80%<
Projection Methods	Desktop front/rear, Ceiling front/rear
Optical Offset	144%
Colors	1.07 billion true color
Color System	NTSC / NTSC 4.43 / PAL (including PAL-M, N) / SECAM/PAL60
Contrast Ratio	2000:1
Aspect Ratio	Native 16:10; Compatible 4:3 and 16:9
Image Size	49 in to 111 in / 1.24 m to 2.82 m
Projection Distance	26 in to 58 in / .66 m to 1.47 m
Throw Ratio	.615:1 (x screen width) *allow 3-5% variance on all projector throw ratios
Speaker	1 x 10W
Zoom Ratio	Fixed zoom
Digital Zoom	4x zoom with pan function
Keystone Correction	Vertical +/– 30 degrees
Horizontal Scan Rate	48 to 120 Hz
Vertical Scan Rate	31 to 92 kHz
Lens Type	Fixed zoom / Manual focus
Lamp	Philips 245W
Lamp Life	2500 (standard) / 4500 (economy)
Remote Control	Multi-function IR remote with laser pointer
Noise Level	40.5db (standard) / 33.5db (economy)
Power Supply	AC 100 to 240V, 50/60Hz
Power Consumption	310W (standard) / 240W (economy) <.5W in standby mode
Safety Certifications	CE, FCC, UL, CB
Computer Compatibility	UXGA, SXGA+, SXGA, XGA, SVGA, VGA resized, VESA standards; PC and Macintosh compatible
Video Compatibility	480i/p, 576i/p, 720p, 1080i
Video Compatibility (HDMI)	SDTV 480P, HDTV 720P, 1080i, 1080p
Inputs	RGB: Mini D-sub 15 pin x 1, HDMI x 1 (HDMI 1.3 type A connector) Composite Video: RCA x 1, S-video x 1 Audio: Mini jack x 2, RCA (L, R) x 1, USB tpe A x 1, Mini USB x 1
Outputs	RGB: Mini D-sub 15 pin x 1 (selectable input/output) Audio: Mini jack x 1
Service and Network Control	LAN: RJ45 x 1, RS232 D-sub 9 pin x 1
Weight	9 lbs / 4.1 kg
Dimensions (W x H x D)	13.7 in x 5.2 in x 14.2 in / 348 mm x 132 mm x 360 mm
Operating Conditions	0-40°C, 32 - 104°F, humidity 20% to 80% non-condensing
Security	Kensington® lock port, keypad lock, anchor security bar
Standard Accessories	AC power cord, VGA cable, USB cable, remote control, user manual (CD), quick start guide, (2) LightPens, interactive USB dongle
Optional Accessories	Replacement remote, cables, USB dongle, WallMount-U, WallMount-U60, soft carry case, USB WiFi dongle, Lamps for Life, EZ WiFi (free)

BOXLIGHT's ProjectoWrite6 Interactive projector
The only integrated wireless interactive projector, featuring dual pen control.
Go wireless with optional WiFi display adapter (dongle), project wirelessly from multiple devices.
Wireless interactive USB connection (2.4 GhZ WiFi)
Every BOXLIGHT projector is based on award-winning patented technology and is hand assembled by one master technician.

KEY FEATURES

Ships with interactive LightPen dual user annotation software
USB thumb drive: PC-less presentation (photo, video, audio, Microsoft Office viewer)
Side changing lamp
Side changing filter
Variable audio out
Multiple display modes
Less than 0.5W power consumption in standby mode
Enhanced LAN control features (PJ link, Creston RoomView™ compatible)
LAN display
USB display
EZ WiFi Optional

Throw Distance

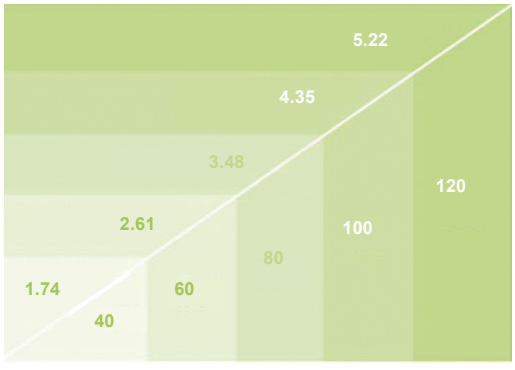

Diagonal Image Size (inches)

Lamps4Life Eligible

Award Winning Technical Support 24/7/365

BOXLIGHT products come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.

© 2013 BOXLIGHT, Inc. Specifications subject to change without notice.
Helps meet ADA Section 508 compliance
BOXLIGHT NE 151 Highway 300, Suite A PO Box 2609 Belfair, WA 98528