MULTI-PURPOSE PROJECTOR

Seattle X30N+


Specifications


Model	SEATTLE X30N+
Technology	.63" 3LCD
Brightness	3000 Lumen (Standard) 1950 (economy mode)
Native Resolution	1024 x 768 (XGA)
Supported Resolution	up to 1600 x 1200 (UXGA)
Brightness Uniformity	80%<
Projection Methods	Tabletop front/rear, Ceiling front/rear
Colors	16.7 million true color
Contrast Ratio	600:1
Aspect Ratio	Native 4:3; Compatible 16:9, 16:10
Image Size	40 in to 300 in / 1.0 m to 7.6 m
Projection Distance	5 ft to 30 ft / 1.5 m to 9.4 m
Lens Shift	N/A
Throw Ratio	1.45 ~ 1.73 (manual zoom and focus)
Zoom Ratio	1.2:1
Digital Zoom	4x zoom with pan function
Keystone Correction	Vertical +/– 30 degrees
Horizontal Scan Rate	31 to 92kHz
Vertical Scan Rate	48 to 120Hz
Audio Output	1 x 8W mono
Lamp	240W
Lamp Life	3000 (standard) / 4000 (economy)
Remote Control	Multi-function IR remote with laser pointer
Noise Level	>33dB eco mode
Power Supply	Universal AC Input 100–240V at 50–60Hz
Power Consumption	310W <1W standby mode
Safety Certifications	FCC-B, UL, cUL,TUB, CD, CE, CCC
Computer Compatibility	UXGA, SXGA+, SXGA, XGA, SVGA, VGA resized; VESA standards; PC and Macintosh compatible
Video Compatibility	EDTV (480p), HDTV (576i/p, 720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM
Connectivity	VGA x 2*, HDMI, composite video with 2 RCA (R/L) audio-in, component video, S-video, Audio 3.5 mm in x 2, LAN control, RS232, USB port for mouse function, VGA* and 3.5 mm output *2 VGA inputs, 2nd VGA input is input or output optional
Service and Network Control	RS232, RJ45
Weight	7.3 lbs / 3.3 kg
Dimensions (W x H x D)	12.8 in x 10.24 in x 3.8 in / 32.5 cm x 26 cm x 9.7 cm
Operating Temperature	N/A
Security	Kensington® lock port, keypad lock, anchor security bar
Standard Accessories	AC power cord, VGA cable, USB cable, remote control with batteries, user manual (CD), carrying case
Optional Accessories	Replacement lamp, replacement remote, ALLINONE ceiling mount, USB-booster, harsh environment filter



Key Features

- Designed for tough environment
- Side changing lamp
- Side changing filter
- Quick off/on
- Advanced anti-theft features, Kensington lock, keypad lock and security anchor bar
- Seven display modes (Natural, Cinema, Daylight, Green board, White board, Black board and User)
- Logo capture
- Image freeze function
- Digital zoom adjustment up 4x
- Built in network control software via RJ45 (LAN) connection
- Multi-language OSD (On-Screen Display)
- Powerful 8W mono speaker
- Closed caption

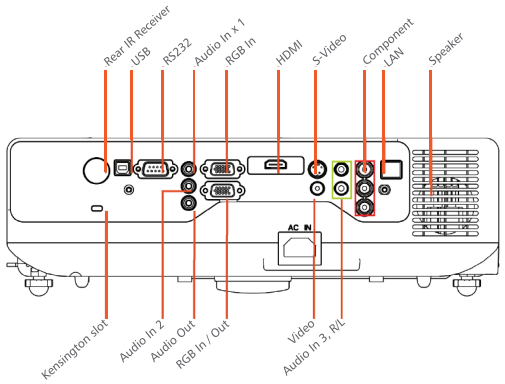

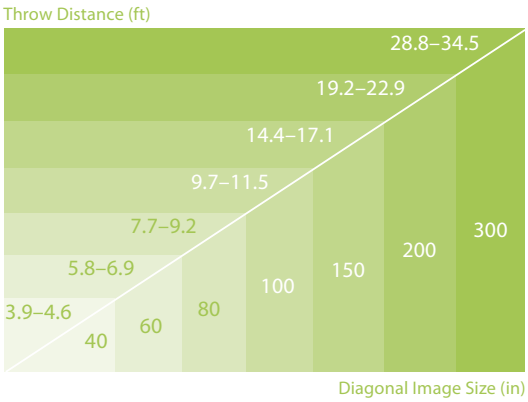

Award Winning Technical Support 24/7/365

And, of course, all BOXLIGHT products come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.

Lamps4Life Eligible

© 2012 BOXLIGHT, Inc. Specifications subject to change without notice.
Helps meet ADA Section 508 compliance
BOXLIGHT NE 151 Highway 300, Suite A PO Box 2609 Belfair, WA 98528