
Panasonic PT-FX500




PANASONIC PT-FX500

Brief Introduction Beta 2.5	A brief introduction to the PT-FX500: The Panasonic stationary LCD projector offers 5000 Ansi lumens, a contrast of 10000:1 and an XGA 1024 x 768 resolution. The manufacturer specifies a lamp life of 6000 hours, which is over 8.2 years with a daily viewing time of 2 hours. With the lens shift function, the projector can be positioned very freely. Thanks to the brightness of 5000 Ansi lumens, an image width of 616 cm is possible. The projector can also handle slightly brighter rooms with a narrower image width (we recommend max. 411 cm). The model was built by Panasonic in 2016 and is no longer current.
Display Type	3 x 0,63" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	5000
Projector: Contrast	10000:1 full on/off
Projector: Black Level	0,5000 min. Lumen
Screen	1667 Lux (bei 200 cm Screen) 10000:1 full on/off 0,167 min. Lumen
Lens shift	Vert.: +/-50% Hori.: +/-30%
Resolution	XGA 1024 x 768 786.432 Pixel
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	270W UHM Lamp Articel Nr.: ET-LAEF100
Light Life	6000 h. 8000 h. in Eco Mode
Operating Costs	1,52% / 0,05 €
Focus	Manual
Zoom	Manual 1,85
Objective	F=1,7-2,2 f=17,1-31,7 mm
Throw Ratio	1,32-2,44:1
Audio	10W
Connections	HDMI in D-sub 15pin in und out Cinch Video in Cinch Stereo in Mini Jack Audio in und out USB Typ A in RS232C Din 9 pin in RJ45 mit DIGITAL LINK HDBaseT in
Ceiling Mounting	Yes

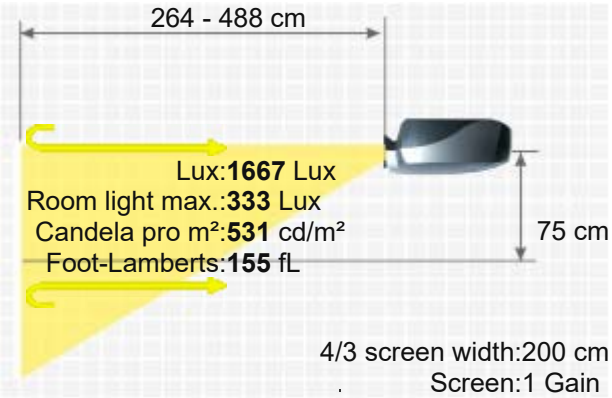

Power	400W
Size WxHxD	498 x 145 x 398,3 mm (19,6"x5,7"x15,7") 28,74 L/dm³
Operating Noise	33 / 29 dB in Eco Mode

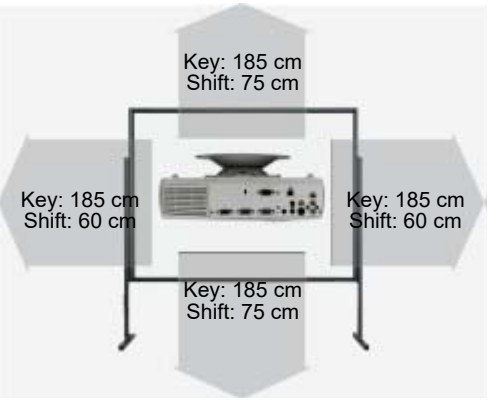

Weight	9,00 kg / 19,84 lbs.
Keystone	Vert.: +/-35° Hori.: +/-35°
Illumination	90%
Frequenz	H-sync: 15-91 kHz V-sync: 24-120 Hz Range max.: 162 MHz
Foot-Lamberts	155 fL / max. 616 cm screen width 531 cd/m²
Features	■ Lens shift Funktion ■ Eco Mode ■ Dynamic iris ■ PJLink™ ■ Lan network compatible. ■ DICOM simulation

Optional

Remote control original	N2QAYA000123 / N2QAYA000162
Air filter original	ET-RFF200
Ceiling bracket original	ET-PKD120S
Ceiling bracket original	ET-PKD120H
Lamp original	ET-LAEF100

Status: Order here: https://www.hcinema.de/lampen/shop-en.php?id=fro9001021
2016 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2016-02-12 13:16:41

Data



More Details

https://www.projector-database.com/pro/panasonicptfx500-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.