
Panasonic PT L735E/U





Brief Introduction Beta 2.5	The Panasonic PT L735E/U LCD projector has 2600 Ansi lumens, a contrast of 300:1 and an XGA 1024 x 768 resolution. Horizontal and vertical keystone correction makes setting up the image childs play. 444 cm picture width, the projector will be able to illuminate well. However, if room light is available, the picture width should ideally not exceed 296 cm. At just 30 decibels, the device is one of the quieter projectors. The model was built by Panasonic in 2003 and is no longer current.
Display Type	3 x 0,9" LCD TFT Panel mit MLA XGA 4/3 Liquid Crystal Display with Micro Lense Array
Projector: Ansi-Lumen	2600
Projector: Contrast	300:1 full on/off
Projector: Black Level	8,6667 min. Lumen
Screen	841 Lux (bei 203 cm Screen) 300:1 full on/off 2.832 min. Lumen
Offset	
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	NTSC PAL SECAM Digital-TV-kompatibel HDTV 720p 1080i 576p 480p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200W UHM Lamp Articel Nr.: ET-LA735
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,25
Objective	F=1,7-2,1 f=28,7-36 mm
Throw Ratio	1,5-1,9:1
Audio	2 x 5W
Connections	D-sub 15 pin in und out S-Video in Cinch Video in Cinch Stereo in USB Mini Jack in und out RS232C

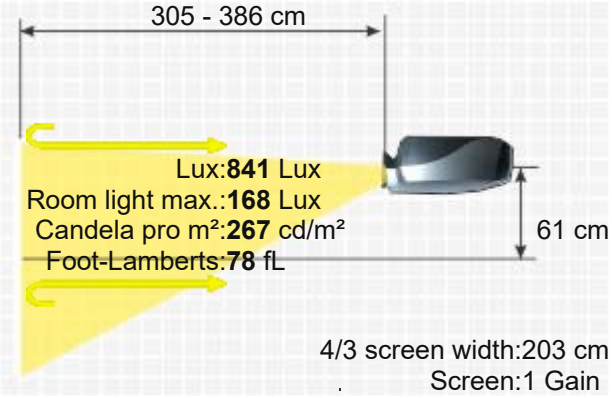

PANASONIC PT L735E/U

Ceiling Mounting	Yes
Power	280W / 5W standby
Size WxHxD	248 x 115 x 359 mm (9,8"x4,5"x14,1") 10,24 L/dm³
Operating Noise	30 / 28 dB in Eco Mode
Weight	4,00 kg / 8,82 lbs.
Keystone	Vertical und horizontal
Illumination	90%
Frequenz	H-sync: 15-91 kHz V-sync: 50-81 Hz
Foot-Lamberts	78 fL / max. 444 cm screen width 267 cd/m²

Features

- Direkt Power Off
- Freeze
- Blackboard Modus
- Eco Mode
- Kensington Slot
- sRGB
- Password protection
- Remote control with laser pointer und mouse control
- Digital Zoom
- Freeze Auto Setup
- Blackboard Mode

Optional

Lamp ruby	Ruby-LMP2730
Lamp incl. air filter original	ET-LA735
Compatible lamp	LMP-K2730
Universal Remote original	Fernb-uni-V3
Air filter original	fi2730

Status: Order here: https://www.hcinema.de/lampen/shop-en.php?id=d2730
2003 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details

HCinema
https://www.projector-database.com/pro/panasonicptl735-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.