
Panasonic PT LB423



Brief Introduction Beta 2.5	A brief introduction to the PT LB423: The Panasonic LCD projector offers 4100 Ansi lumens, a contrast of 16000:1 and an XGA 1024 x 768 resolution. The manufacturer Panasonic specifies a lamp life of 10000 hours, which is over 13.7 years if enjoyed for two hours every day. Thanks to the horizontal and vertical keystone correction, the projector can be positioned very freely. An image width of up to 558 cm is possible as the projector has 4100 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 372 cm. Even 1080P video signals are no problem for the projector. The model was built by Panasonic in 2016 and is no longer current.
Display Type	3 x 0,63" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	Projector: 4100 / Screen: 1367 Lux (bei 200 cm Screen)
Contrast	Projector: 16000:1 full on/off / Screen: 16000:1 full on/off
Black Level	Projector: 0,2563 min. Lumen / Screen: 0,085 min. Lumen
Offset	
Resolution	XGA 1024 x 768 786.432 Pixel WUXGA 1920 x 1200 compressed
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	230W Lamp Articel Nr.: ET-LAL500
Light Life	5000 h. 10000 h. in Eco Mode
Operating Costs	9,52% / 0,04 €
Focus	Manual
Zoom	Manual 1,2
Objective	F=1,6-1,76 f=19,16-23,02 mm
Throw Ratio	1,48-1,78:1
Audio	2W Mono
Connections	HDMI in 2 x D-sub 15pin in 1 x out Cinch Video in Cinch Stereo in Mini Jack Audio in und out

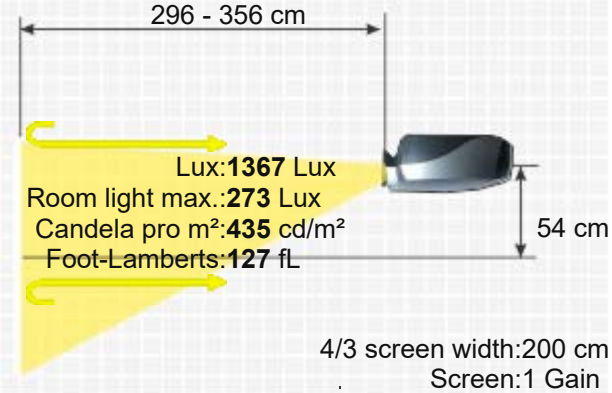


PANASONIC PT LB423

RS232C Din 9 pin in
USB Typ A,B in
RJ45 in



Ceiling Mounting	Yes
Power	300W
Size WxHxD	335 x 96 x 252 mm (13,2"x3,8"x9,9") 8,1 L/dm³
Operating Noise	37 / 28 dB in Eco Mode

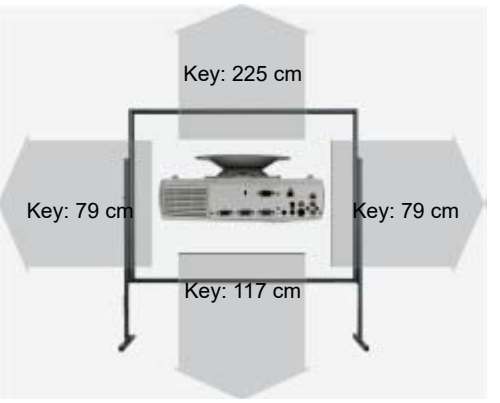

Weight	2,90 kg / 6,39 lbs.
Keystone	Vert.: +/-30° automatisch Hori.: +/-15°
Illumination	80%
Frequenz	H-sync: 15-91 kHz V-sync: 50-85 Hz Range max.: 162 MHz
Foot-Lamberts	127 fL / max. 558 cm screen width 435 cd/m²

Features

- Full HD 1080P compatible
- Eco Mode
- Automatic and manual vertical keystone correction
- Dynamic iris
- Optional Wi-Fi network compatible.
- Lan network compatible.

Optional

Remote control original	N2QAYA000110 / N2QAYA000116 / N2QAYA000191
Air filter original	ET-RFL300
Ceiling bracket original	ET-PKL100S
Ceiling bracket original	ET-PKL100H
Lamp original	ET-LAL500

Status

Order here: https://www.hcinema.de/lampen/shop-en.php?id=fro24167
2016 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2016-12-22 12:17:01

Data



More Details

https://www.projector-database.com/pro/panasonicptlb423-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.