
Byintek Sky K6



Brief Introduction Beta 2.5	A brief introduction to the Byintek Sky K6. The LCD LED projector has an HDTV 1280 x 720 resolution and a contrast of 3000:1. The manufacturer Byintek specifies a service life of 30,000 hours, which converts to over 20.5 years at 4 hours per day. A picture width of up to 144 cm is possible. However, the picture should be smaller in room light. We recommend max. 96 cm. The model is also Full HD 1080P compatible.
Display Type	1 x LCD Panel HDTV 16/9 Liquid Crystal Display
Projector Ansi-Lumen	200
Contrast	3000:1
Black Level	0,0667 min. Lumen
Offset	-
Screen Ansi-Lumen	89 Lux (bei 200 cm Screen)
Contrast	3000:1
Black Level	0,03 min. Lumen
Resolution	HDTV 1280 x 720 921.600 Pixel HDTV 1920 x 1080 compressed
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p
Application	Game-Portabel | Very portable, small-screen projections. Very narrow picture width and rooms with very little light.
Light Source	LED
Light Life	30000 h.
Operating Costs	0,00 € LED
Focus	Manual
Zoom	No Zoom
Objective	-
Throw Ratio	1,4:1
Audio	2 x 3W
Connections	HDMI in Composite Video Mini Jack Audio out USB-A in USB-C in
Ceiling Mounting	Yes
Power	38W
Size WxHxD	158 x 62 x 120 mm (6,2"x2,4"x4,7") 1,18 L/dm³
Operating Noise	-

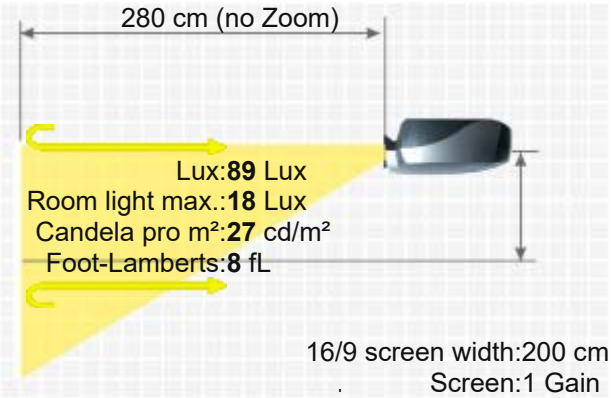

BYINTEK SKY K6

Weight	0,480 kg / 0 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	8 fL / max. 144 cm screen width 27 cd/m²
Features	■ Full HD 1080P compatible -
Status	2024 Current model // Last update of the data: 2024-09-18
Data	
More Details	https://www.projector-database.com/pro/byintekskyk6-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.