
Pico Genie M550 Plus



PICO GENIE M550 PLUS

Brief Introduction Beta 2.5	The M550 Plus LED DLP projector from Pico Genie has 650 Ansi lumens, a contrast of 1000:1 and a WXGA 1280 x 800 resolution. The manufacturer specifies an LED service life of 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. A picture width of up to 259 cm is possible as the projector has 650 Ansi lumens. However, if room light is available, the picture should be max. 173 cm wide. Thanks to the built-in 13500 mAh battery, no power supply is required, allowing the projector to be set up quickly and flexibly. The projector has screen mirroring support, which enables direct playback of videos in high resolution and surround sound from smartphones, tablets and PCs with Android, Windows or iOS via Wi-Fi. Even 1080P video signals are no problem for the projector. The model was built by Pico Genie 2020 and is no longer current.
Display Type	DLP Chip WXGA 16/10 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 650 / Screen: 260 Lux (bei 200 cm Screen)
Contrast	Projector: 1000:1 / Screen: 1000:1
Black Level	Projector: 0,6500 min. Lumen / Screen: 0,261 min. Lumen
Offset	-
Resolution	WXGA 1280 x 800 1.024.000 Pixel
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p
Application	Micro-Portabel | Battery projector | Small mobile presentations.. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	LED
Light Life	20000 h.
Operating Costs	0,00 € LED
Focus	Manual
Zoom	No Zoom
Objective	-
Throw Ratio	1,2:1
Audio	3W
Connections	HDMI in D-sub 15pin in Mini Jack Audio out USB in
Ceiling Mounting	Yes
Power	55W
Size WxHxD	200 x 38 x 145 mm (7,9"x1,5"x5,7") 1,1 L/dm³
Operating Noise	-

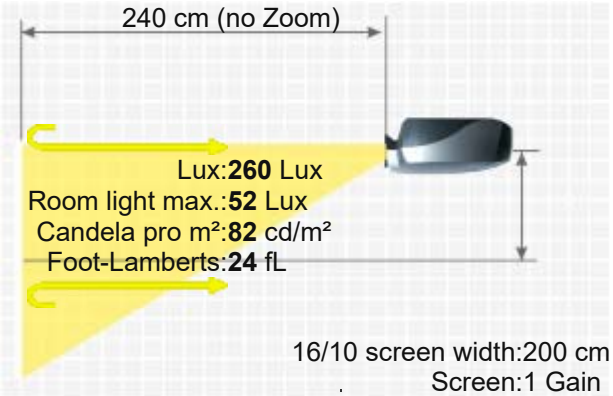

Key: 201 cm



Weight	0,850 kg / 0 lbs.
Keystone	Vert.: +/-40° automatisch
Illumination	-
Frequenz	-
Foot-Lamberts	24 fL / max. 259 cm screen width 82 cd/m²
Features	■ Full HD 1080P compatible ■ Eco Mode ■ Automatic and manual vertical keystone correction ■ Wi-Fi network compatible. ■ 13500 mAh

Optionaler Zubehör

Status	2020 Discontinued (EOL) // Last update of the data: 2025-01-27 Created: 2020-03-18 19:27:35
Data	
More Details	HCinema https://www.projector-database.com/pro/picogeniem550plus-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.