
Canon LV 7575




CANON LV 7575

Brief Introduction Beta 2.5	Manufacturer Canon offers the LV 7575, an LCD projector with XGA 1024 x 768 resolution and a contrast ratio of 800:1. The built-in lens shift and keystone correction function provide freedom in projection adjustment. An image width of up to 646 cm is possible; if the image width is smaller (we recommend max. 431 cm), rooms with residual light are also no problem. The model is also Full HD 1080P compatible. The projector was launched in 2006 and is no longer sold by the manufacturer.
Display Type	3 x 1,3" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	Projector: 5500 / 4200 im Eco Mode Screen: 1833 Lux (bei 200 cm Screen)
Contrast	Projector: 800:1 full on/off Screen: 800:1 full on/off
Black Level	Projector: 6,8750 min. Lumen Screen: 2,3 min. Lumen
Lens shift	Vert.: +50% -0% motorisch
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	318W UHP Lamp Article Nr.: LV-LP28 / 1706B001AA
Light Life	1500 h. 2000 h. in Eco Mode
Operating Costs	-
Focus	Powered
Zoom	Powered 1,3
Objective	F=1,7-2,0 f=48,4-62,8 mm
Throw Ratio	1,7-2,3:1
Audio	2 x 2W Stereo
Connections	DVI-D mit HDCP D-sub 15pin in oder out 5 x BNC RGBHV in YUV in Cinch Video in Cinch Stereo in S-Video in Mini Jack USB Typ B

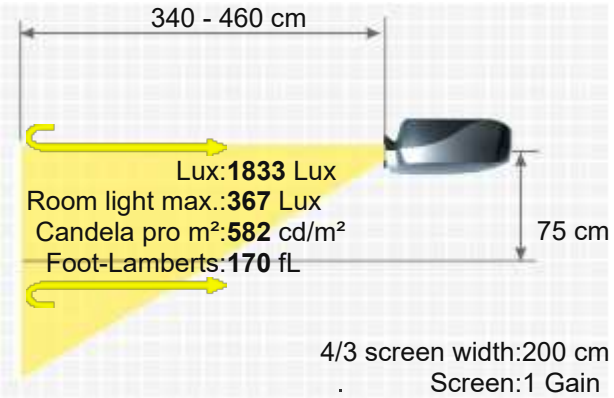

	RS232C Kabelfernbedienung
Ceiling Mounting	Yes, is possible.
Power	365W / standby 26W
Size WxHxD	319 x 168 x 430 mm (12,6"x6,6"x16,9") 23,04 L/dm³
Operating Noise	38 / 36 dB in Eco Mode
Weight	8,70 kg / 19,18 lbs.
Keystone	Vert.: +/-35° Hori.: +/-15°
Illumination	90%
Frequenz	H-sync: 15-100 kHz V-sync: 48-100 Hz Range max.: 180 MHz
Foot-Lamberts	170 fL / max. 646 cm screen width 582 cd/m²
Features	■ Full HD 1080P compatible ■ Lens shift Funktion motorisch ■ Freeze ■ User logo ■ Eco Mode ■ Kensington Slot ■ Gamma correction ■ 24/7 continuous operation capable ■ Remote control with laser pointer und mouse control ■ Digital zoom ■ 10-bit image processor ■ Optional Network-Imager LV-NI02
Screen Mirroring	-

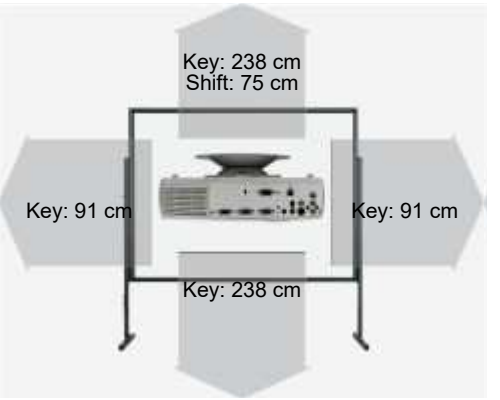

Optional accessories

	Nackte Osram Lampe	NLMP15620	94,31 €
	Lampe Ruby	Ruby-LMP15620	124,30 €
	Lampe Original	LV-LP28 / 1706B001AA	EOL €
	Kompatible Lampe	LMP-K15620	70,34 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	945 060 2239	EOL €
	Luftfilter (klein) Original	POA-FIL-130-k / 910 303 8781	EOL €
	Luftfilter (gross) Original	POA-FIL-130-g / 910 303 8774	EOL €
	Deckenhalterung 100-120	Halterung100	47,86 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
		Zoom Optional Lenses			
LV-IL04	4.12-5.56:1	8.2-11.1 m	50%		Powered
LV-IL03	2.31-4.19:1	4.6-8.4 m	50%		Powered
LV-IL02	1.26-1.81:1	2.5-3.6 m	50%		Powered
		Fix Optional Lenses			
LV-IL01	0.81:1	1.6 m	0.0% Fix		No Zoom

Status Data 2006 Discontinued (EOL) // Last update of the data: 2023-10-26






More Details

HCinema

https://www.projector-database.com/pro/canonlv7575-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.