
Premier PD S602



PREMIER PD S602

Brief Introduction Beta 2.5	With the PD S602, manufacturer Premier offers a standard portable DLP projector with SVGA 800 x 600 resolution and a contrast of 2000:1. An image width of up to 435 cm is possible as the projector has 2500 Ansi lumens. However, if room light is available, the picture should be max. 290 cm wide. The model was built by Premier in 2004 and is no longer current.
Display Type	1 x 0,55" DDR DLP Chip SVGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 2500 / Screen: 833 Lux (bei 200 cm Screen)
Contrast	Projector: 2000:1 full on/off / Screen: 2000:1 full on/off
Black Level	Projector: 1,2500 min. Lumen / Screen: 0,417 min. Lumen
Offset	-
Resolution	SVGA 800 x 600 480.000 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200W VIP Lamp
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=2,2-2,6 f=20,2-24,2 mm
Throw Ratio	1,81-2,17:1
Audio	1 x 2W
Connections	D-sub 15pin in Cinch Video in S-Video in
Ceiling Mounting	Yes
Power	250W
Size WxHxD	254 x 97 x 201 mm (10"x3,8"x7,9") 4,95 L/dm³
Operating Noise	34 / 32 dB in Eco Mode
Weight	2,20 kg / 4,85 lbs.
Keystone	Vert.: +/-15°



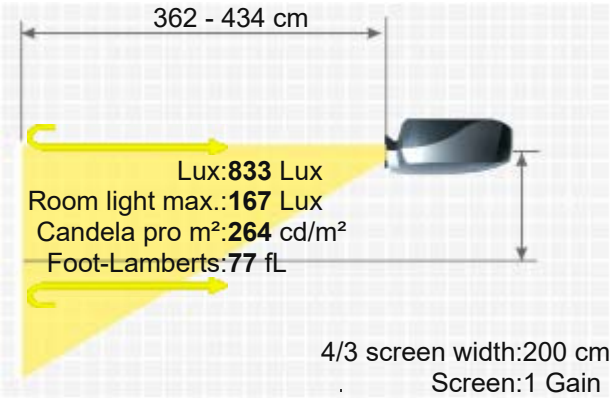

Illumination	85%
Frequenz	H-sync: 31-79 kHz V-sync: 50-85 Hz Range max.: 108 MHz
Foot-Lamberts	77 fL / max. 435 cm screen width
	264 cd/m²
Features	■ Eco Mode
Please note	Daten von Webseite Kontrats und ansi sind im Prospekt weniger.
Status	2004 Discontinued (EOL) // Last update of the data: 2023-08-04



Data




More Details

HCinema

https://www.projector-database.com/pro/premierpds602-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.