
Sharp XG NV6XE/U



Brief Introduction Beta 2.5	The stationary XG NV6XE/U LCD projector from Sharp has 1800 Ansi lumens, a contrast of 250:1 and an XGA 1024 x 768 resolution. The projector can illuminate a picture width of 369 cm well. However, if room light is available, the picture width should ideally not exceed 246 cm. The model was built by Sharp in 1999 and is no longer current.
Display Type	3 x 1,3" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	Projector: 1800 - 2200 / Screen: 600 Lux (200 cm Screen width)
Contrast	Projector: 250:1 full on/off / Screen: 250:1 full on/off
Black Level	Projector: 7,2000 min. Lumen / Screen: 2,429 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	NTSC, PAL, SECAM Pal 60 NTSC 4,43
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	150W UHP Lamp Article Nr.: CLMPF0056CE01
Light Life	2000 h.
Operating Costs	-
Focus	Powered
Zoom	Powered 1,3
Objective	F=1,7-2,3 f=49,1-63,8 mm
Throw Ratio	1,86-2,42:1
Audio	2 x 2W
Connections	Computer RGB x 2 (15 pin mini D-sub x 2) 5-BNC x 1. Computer audio L/R x 2 (3.5mm stereo mini jack). Component x 1 (BNC) Wired Fernbedienung x 1 (3.5mm mini jack). RS232C serial port x 1 (9 pin D-sub) Video x 1 (RCA) S-Video x 1 Video Audio L/R stereo x 1 (RCA). Outputs

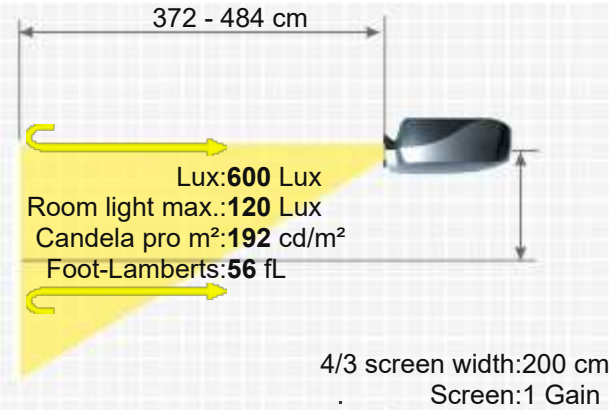

SHARP XG NV6XE/U

Computer RGB x 1 (15 pin mini D-sub).
Audio L/R x 1 (3.5mm mini jack).



Ceiling Mounting	Yes, is possible.
Power	265W
Size WxHxD	261 x 129 x 356 mm (10,3"x5,1"x14") 11,99 L/dm³
Operating Noise	35dB
Weight	7,20 kg / 15,87 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15,0-126,0 kHz V-sync: 43-200 Hz
Foot-Lamberts	56 fL / max. 369 cm screen width 192 cd/m²
Features	■ Freeze ■ User logo ■ Kensington Slot ■ Gamma correction ■ Remote control with laser pointer und mouse control ■
Screen Mirroring	-

Optional accessories

	Nackte Lampe Original	CLMPF0056CE01	EOL €
	Lampe Original	BQC-XGNV6XE/1	EOL €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Deckenhalterung Länge 100-120 mm	Halterung120	47,86 €
	Luftfilter universal	uni3mm	18,15 €

Status 1999 Discontinued (EOL) // Last update of the data: 2026-06-09

Data 

More Details

HCinema

https://www.projector-database.com/pro/sharpxgnv6xe-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.