


CHRISTIE CP4430-RGB

Large-screen auditoriums | Event cinema | Post production

Advanced, yet affordable, DCI compliant cinema projection
featuring Christie RealLaser™ technology for screens up to 80 feet wide



Key features:

- › Ultra-fast processing – HDMI 2.0 and 4x 12GB SDI inputs for 1.06G pixels per sec
- › Long-lasting light source – over 50,000 hours of stable DCI brightness with 8-10 years of low-maintenance operation
- › Low maintenance – Tool-free filter replacements and fully sealed optics for protection against dust ingress
- › Enhanced Wavelength Diversity (EWD) – utilising MPD technology to improve image quality on all screen types
- › Backwards compatibility – works with existing Christie accessories and lenses
- › Best-in-class operational efficiency – 12.3 lumens per watt

CHRISTIE
RealLaser™

Advanced laser light source for accurate reproduction of DCI content

CineLife+™

Adds ultra high frame rate providing each eye 2K 120fps, 4K 120fps, 4K 3D 60fps

DIGITAL CINEMA CONFIGURATOR

Help find the right lens for your projector



Specifications

Christie CP4430-RGB

Brightness	nominal	• Up to 28,000 lumens ¹
	lifetime	• >50,000 hours ²
Contrast ratio		• Up to 6000:1 ³ full field on/off
Digital micromirror device		• 1.38" Enhanced 4K 3-chip DMD DLP Cinema® • 4096 x 2160 (4K)
Color gamut	native gamut	• >95% of Rec 2020 coverage
Processing electronics		• Christie (R) CineLife+™ Series (Series-2 IMB compatible) ⁴ • HDMI 2.0 x 2 • 4K120 fps ⁵ • 1G Ethernet x1 • 12G SDI x 4 • DisplayPort 1.2 x 2 • Remote UI • Electronic Color Convergence (ECC)
Lens mount configuration		• Fully motorized Intelligent Lens System (ILS™)
Lenses		• HB and UHC: 1.13-1.66 / 1.31-1.85 / 1.45-2.17 / 1.63-2.71 / 1.95-3.26 / 2.71-3.89 / 3.89-5.43 / 4.98-7.69
Power input requirements		• Input A: 200-240 VAC @ 50-60Hz, 17A max • Input B (UPS input): 100-240VAC @ 50-60Hz, 10A max
Audible noise		• 56dBA
Cooling		• Liquid pressurized/TEC, self-contained • Heat extraction optional
Power consumption		• 2295W, max DCI brightness, @25°C 7830 BTU/hr
Laser class		• Class 1 – Risk Group 3
Weight		• As installed: 285lbs max (130kg)
Dimensions (w/o lens)	size (LxWxH)	• 37.2 x 28.0 x 20.7" (944 x 711 x 525mm)
Accessories		• Rack mount pedestal • Rack mount pedestal adaptor • Extraction duct adaptor • Touch panel controller (optional) • Enhanced 4K HB and UHC lens suite available

¹ With existing high brightness cinema lens.


² Subject to variables specific to each installation. Please see Christie's laser best practices guide for more information.

³ With new UHC cinema lens.


⁴ Supports legacy Series 2 IMBs. A list of supported versions is available upon request.

⁵ With the GDC SR-6400 IMB.


Front view




Side view

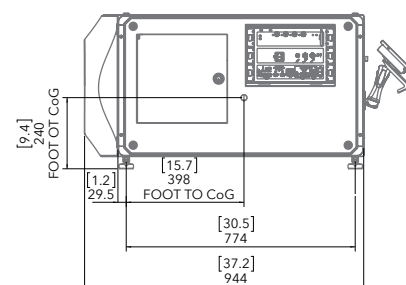

Top view



Back view



Corporate offices

Christie Digital Systems USA, Inc.
Cypress
PH: +1 714-236-8610
Christie Digital Systems Canada Inc.
Kitchener
PH: +1 519-744-8005

Worldwide offices

Australia
PH: +61 (0) 7 3624 4888
Brazil
PH: +55 11 3181-2952
China (Beijing)
PH: +86 10 6561 0240
China (Shanghai)
PH: +(8621) 6030 0500
Colombia
PH: +57 (315) 652-9620

Germany
PH: +49 221 99 512-0
India
PH: +91 (080) 6708 9999
Mexico
PH: +52 (55) 4744-1791
Singapore
PH: +65 6877 8737

South Korea
PH: +82 2 702 1601
Spain
PH: +34 (0) 91 633 99 90
United Arab Emirates
PH: +971 (0) 4 503 6800
United Kingdom
PH: +44 (0) 118 977 8000
United States (Arizona)
PH: +1 602-943-5700

For the most current specification information, please visit christiedigital.com

Copyright 2022 Christie Digital Systems USA, Inc. All rights reserved. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. "Christie" is a trademark of Christie Digital Systems USA, Inc., registered in the United States of America and certain other countries. DLP® and the DLP logo are registered trademarks of Texas Instruments. Performance specifications are typical. Due to constant research, specifications are subject to change without notice.
CD2497-CP4430-RGB-Datasheet-Mar-22-EN



CHRISTIE®