Sony VPL FH36 /W/B



Brief Introduction Beta 2.5	The Sony model VPL FH36 /W/B is an LCD projector with WUXGA 1920 x 1200 resolution and a contrast of 2000:1. The projector also offers a lens shift function, which makes setting up the image childs play. An image width of up to 733 cm is possible as the projector has 5200 Ansi lumens. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 489 cm. Playing 1080P is also no problem for the projector. The model was built by Sony in 2012 and is no longer current.
Display Type	3 x 0,76" LCD TFT Panel WUXGA 16/9 Liquid Crystal Display
Ansi-Lumen	Projector: 5200 / 3900 im Eco Mode — Screen: 2311 Lux (bei 200 cm Screen)
Contrast	Projector: 2000:1 full on/off — Screen: 2000:1 full on/off
Black Level	Projector: 2,6000 min. Lumen — Screen: 1,157 min. Lumen
Lens shift	Vert.: +60% -0% Hori.: +/-32%
Resolution	WUXGA 1920 x 1200 2.304.000 Pixel QXGA 2048 x 1536 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	330W Lamp Articel Nr.: LMP-F331
Light Life	3000 h. 4000 h. in Eco Mode
Operating Costs	3,66% / 0,12 €
Focus	Manual
Zoom	Manual 1,64
Objective	-
Throw Ratio	1,4-2,3:1
Audio	-
Connections	HDMI in DVI-D in D-sub 15 pin in ind out 5 x BNC RGBHV in S-Video in Cinch Video in RS232C

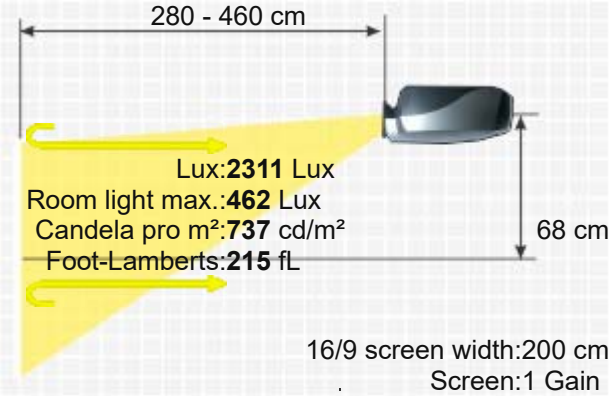

SONY VPL FH36 /W/B

	RJ45 in
Ceiling Mounting	Yes
Power	440W
Size WxHxD	390 x 148 x 477 mm (15,4"x5,8"x18,8") 27,53 L/dm³
Operating Noise	35dB

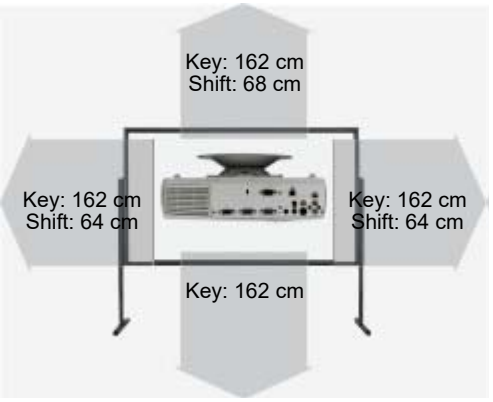

Weight	8,30 kg / 18,3 lbs.
Keystone	Vert.: +/-30° Hori.: +/-30°
Illumination	-
Frequenz	H-sync: 15-92 kHz V-sync: 48-92 Hz
Foot-Lamberts	215 fL / max. 733 cm screen width 737 cd/m²

Features

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- Blackboard Modus
- Eco Mode
- Gamma correction
- Warping
- Password protection
- PJLink™
- Lan network compatible.
- DICOM Simulation
- Picture-side-by-side
- Model ‘W’ is white Model ‘B’ is black.

Optional

Object lens original	VPLL-1008
Lamp original	LMP-F331
Remote control original	149289111 / RM-PJ27 / 148909211 / RM-PJ19

Order here: https://www.hcinema.de/lampen/shop-en.php?id=hc1097

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
VPLL-Z2009	0.85-1:1	1.7-2 m			No Zoom
VPLL-Z1032PK	3.18-4.84:1	6.4-9.7 m	60%	+/-32%	Manual
VPLL-Z1024PK	2.34-3.19:1	4.7-6.4 m	60%	+/-32%	Manual
Fix Optional Lenses					
VPLL-Z2009	0.65:1	1.3 m	0.00% Fix		No Zoom
VPLL-1008	0.8:1	1.6 m	0.0% Fix		No Zoom

Status: 2012 Discontinued (EOL) // Last update of the data: 2023-08-04

Data: Created: 2012-10-24 13:57:13

More Details: https://www.projector-database.com/pro/sonyvplfh36-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.