


Christie Mirage 4K35

CHRISTIE MIRAGE 4K35

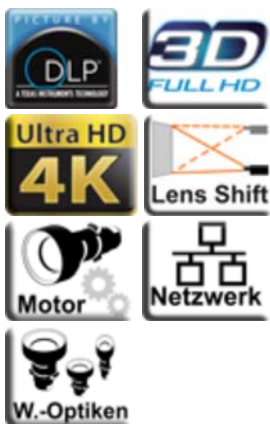

The E-Cinema Mirage 4K35 3D DLP has 32500 Ansi lumens, a contrast of 2000:1 and a UHD (4K+2K) 4096 x 2160 resolution. The manufacturer specifies a lamp life of 3500 hours, which converts to over 4.8 years at 2 hours per day. With the lens shift function, the projector can be positioned very freely. Thanks to the brightness of 32500 Ansi lumens, a picture width of 535 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend max. 357 cm). Playback of 1080P and 4K as well as 3D is also no problem for the projector, meaning that all Blu-ray formats currently on offer can be recognized by the projector. It was launched in 2013 and is no longer offered by the manufacturer Christie, but is still very popular in our projector database.

Brief Introduction

Display Type

3 x 1,38" DLP Chip
UHD 19/10 Ti Digital Light Processing Chip

Ansi-Lumen

32500 / bei 6kW Lampe

14955 Lux (bei 203 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

16,2500 min. Lumen

7.486 min. Lumen

Lens shift

Vert.: +/-56% Hori.: +/-19%

Resolution

UHD (4K+2K) 4096 x 2160

Video Modes

8.847.360 Pixel

3D Compatibility

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, 3D, EDTV 480p, 576p

Application

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Light Source

Frame Sequential (3D Ready)

Light Life

E-Cinema | Digital Cinema (D-Cinema) in the movie theater.

Operating Costs

Very large screen width and rooms with plenty of light and shaded daylight.

Focus

2,0 / 3,0 / 4,5 / 6,0 Lamp

Zoom

Articel Nr.: 03-000697-01P

Objective


003-000600-02

Throw Ratio

3500 / 2500 / 900 / 750 h. Nach Watt

Audio

-

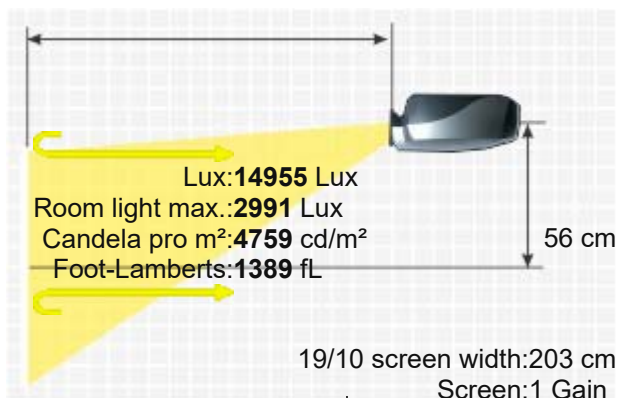

Connections2 x Twin DisplayPort input card
RS232C
RJ45 in

Ceiling Mounting-

Power7000W bei 6000W Lampe

Size WxHxD1298 x 483 x 648 mm (51,1"x19"x25,5") 406,25 L/dm³

Operating Noise-

Weight114,00 kg / 251,33 lbs.

Keystone-


Illumination-

Frequenz-

Foot-Lamberts1389 fL / max. 535 cm screen width
4759 cd/m²

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Lan network compatible.
- 22500 ANSI (25,000 center) lumens – 3.0kW lamp CDXL-30SD
- 16000 ANSI (18,000 center) lumens – 3.0kW lamp CDXL-30
- 9000 AN SI (10,000 centre) lumens – 2.0 kW lamp CDXL-20
- 32500 ANSI (35,000 centre) lumens – 6.0kW lamp CDXL-60
- 27000 ANSI (29,000 centre) lumens – 4.5kW lamp CDXL-45
- 18000 ANSI (19,500 centre) lumens – 3.0kW lamp CDXL-30
- 12000 ANSI (13,000 centre) lumens – 2.0kW lamp CDXL-20

Features

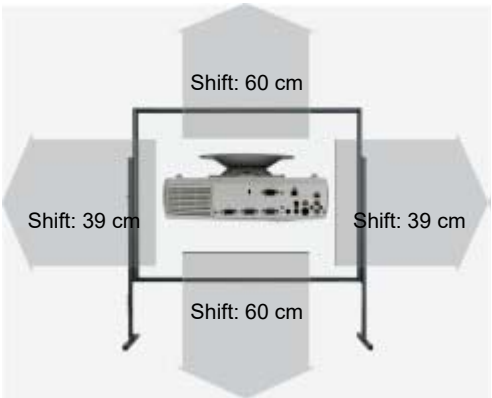

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
5.43:1-7.69:1	5.43-7.69:1	11-15.6 m	+/-56%	+/-19%	Powered
3.89-5.43:1	3.89-5.43:1	7.9-11 m	+/-13%	+/-4%	
2.71-3.89:1	2.71-3.89:1	5.5-7.9 m	+/-13%	+/-4%	Powered
1.98-2.71:1	1.98-2.71:1	4-5.5 m	+/-13%	+/-4%	Powered
1.63-2.17:1	1.63-2.17:1	3.3-4.4 m	+/-13%	+/-4%	Powered
1.31-1,63:1	1.31-1.63:1	2.7-3.3 m	+/-13%	+/-4%	
1.13-1.31:1	1.13-1.31:1	2.3-2.7 m	+/-56%	+/-19%	Powered
Fix Optional Lenses					
1.0:1	1:1	2 m	+/-29%	+/-9%	No Zoom
0.72:1	0.72:1	1.5 m	0.0% Fix		No Zoom

Status2013 Discontinued (EOL) // Last update of the data: 2023-08-23
Created: 2013-06-20 12:55:01

Data

More Details



HCinema

<https://www.projector-database.com/pro/christiemirage4k35-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.