Videoseven PD702X



Brief Introduction Beta 2.5	The PD702X DLP has 3000 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. An image width of up to 477 cm is possible as the projector has 3000 Ansi lumens. However, if room light is available, the picture should be max. 318 cm wide. The model was built by Videoseven in 2005 and is no longer current.
Display Type	1 x 0,7" 12 Grad DDR DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 3000 / Screen: 1000 Lux (bei 200 cm Screen)
Contrast	Projector: 2000:1 full on/off / Screen: 2000:1 full on/off
Black Level	Projector: 1,5000 min. Lumen / Screen: 0,501 min. Lumen
Offset	
Resolution	XGA 1024 x 768 786.432 Pixel
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	250W Lamp
Light Life	-
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	f=23,6-28,25 mm
Throw Ratio	1,64-1,97:1
Audio	1 x 2W
Connections	D-sub 15pin in und out S-Video in Cinch Video in Cinch Stereo in USB in RS232C
Ceiling Mounting	Yes
Power	300 / 250W in Eco Mode
Size WxHxD	290 x 95 x 220 mm (11,4"x3,7"x8,7") 6,06 L/dm³
Operating Noise	36 / 34 dB in Eco Mode

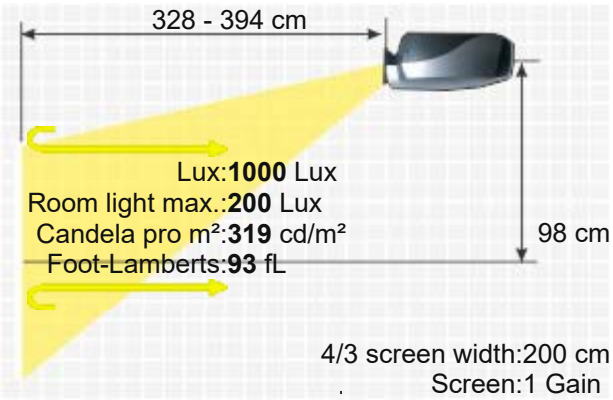

Key: 217 cm

VIDEOSEVEN PD702X

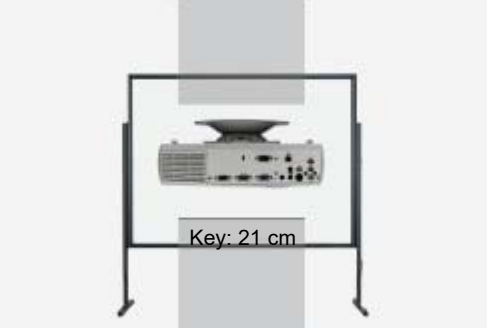

Weight	3,00 kg / 6,61 lbs.
Keystone	Vert.: +/-20°
Illumination	80%
Frequenz	H-sync: 31-79 kHz V-sync: 50-85 Hz Range max.: 108 MHz
Foot-Lamberts	93 fL / max. 477 cm screen width 319 cd/m²
Features	■ Freeze ■ Eco Mode ■ Kensington Slot ■ sRGB ■ Gamma correction ■ Remote control with laser pointer und mouse control
Status	2005 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	
More Details	HCinema https://www.projector-database.com/pro/videosevenpd702x-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.